

8

7

6

5

4

3


2

1

ROHS

H

G

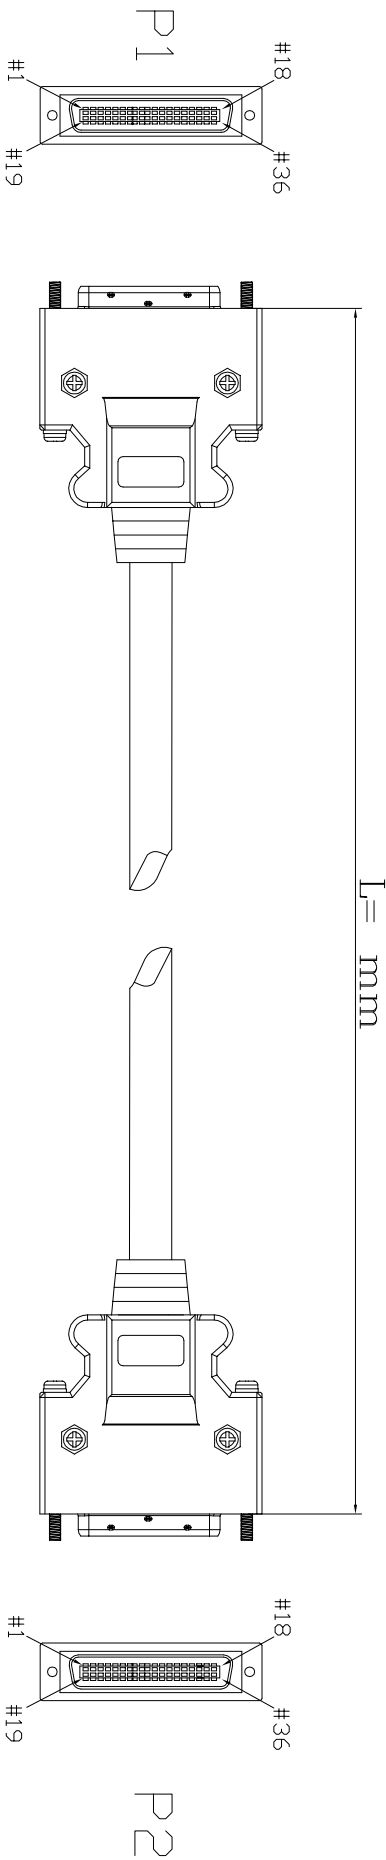

P1

P2

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~33		4~33
34		34
35		35
36		36
Shell		Shell

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN. DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

B

C

D

E

F

G

H

A

QUALITY SYMBOLS		UNIT		SCALE		TOLERANCES	
■:	CRITICAL	mm	2:1	±0.10			
⊗:	MAJOR						
▽:	ZERO DEFECT						
REV	DESCRIPTION	DATE					

2	CABLE	UL2919 28AWG*18P+AEB	1PCS
---	-------	----------------------	------

1	CONNECTOR	PVC JACKET COLOR:BLACK OD= 8.0mm	2SET
ITEM		SCSI 36P male solder ASS'Y TYPE	QTY
PART NAME		DESCRIPTION	
CHECKED		DRAWN	PART NO.
DESIGN		SC36MM01-XXM	SHT
		1/1	

jock		DESCRIPTION	SCSI 36P I/O Cable
		DRAWING NO.	SC3611-001
		REV	A

8

7

6

5

4

3

2

1

A