

8

7

6

5

4

3

2

1

ROHS



H

H



G

G

P1

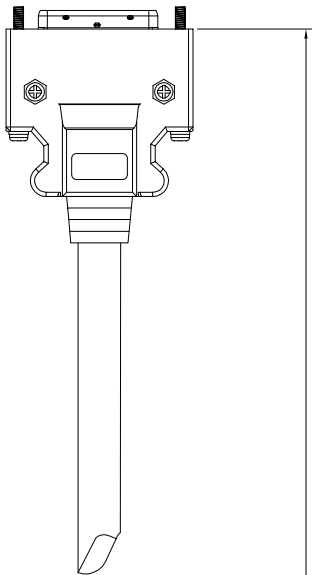

L= mm

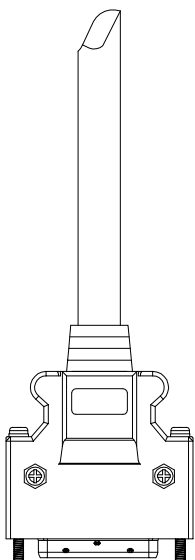

P2

F

E

PIN ASSIGNMENT

P1	SIGNAL	P2
1		1
2		2
3		3
4~23		4~23
24		24
25		25
26		26
Shell		Shell

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

C

D

B

B

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO KinKuo INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN REMISSION.

A

A

REV	DESCRIPTION	DATE
A	图面发行	2017-07-10

QUALITY SYMBOLS

■: CRITICAL

☒: MAJOR

▽: ZERO DEFECT

东莞市箐国电子有限公司

www.kinkuo.com

ITEM	PART NAME	DESCRIPTION	PART NO.	SCSI 26P I/O Cable
1	CONNECTOR	SCSI 26P male solder ASS'Y	SC26MM01-XXM	2SET
2	CABLE	UL2919 28AWG*13P+AEB PVC JACKET COLOR:BLACK OD= 7.5mm		1PCS

QTY	1/1
-----	-----

8

7

6

5

4

3

2

1