



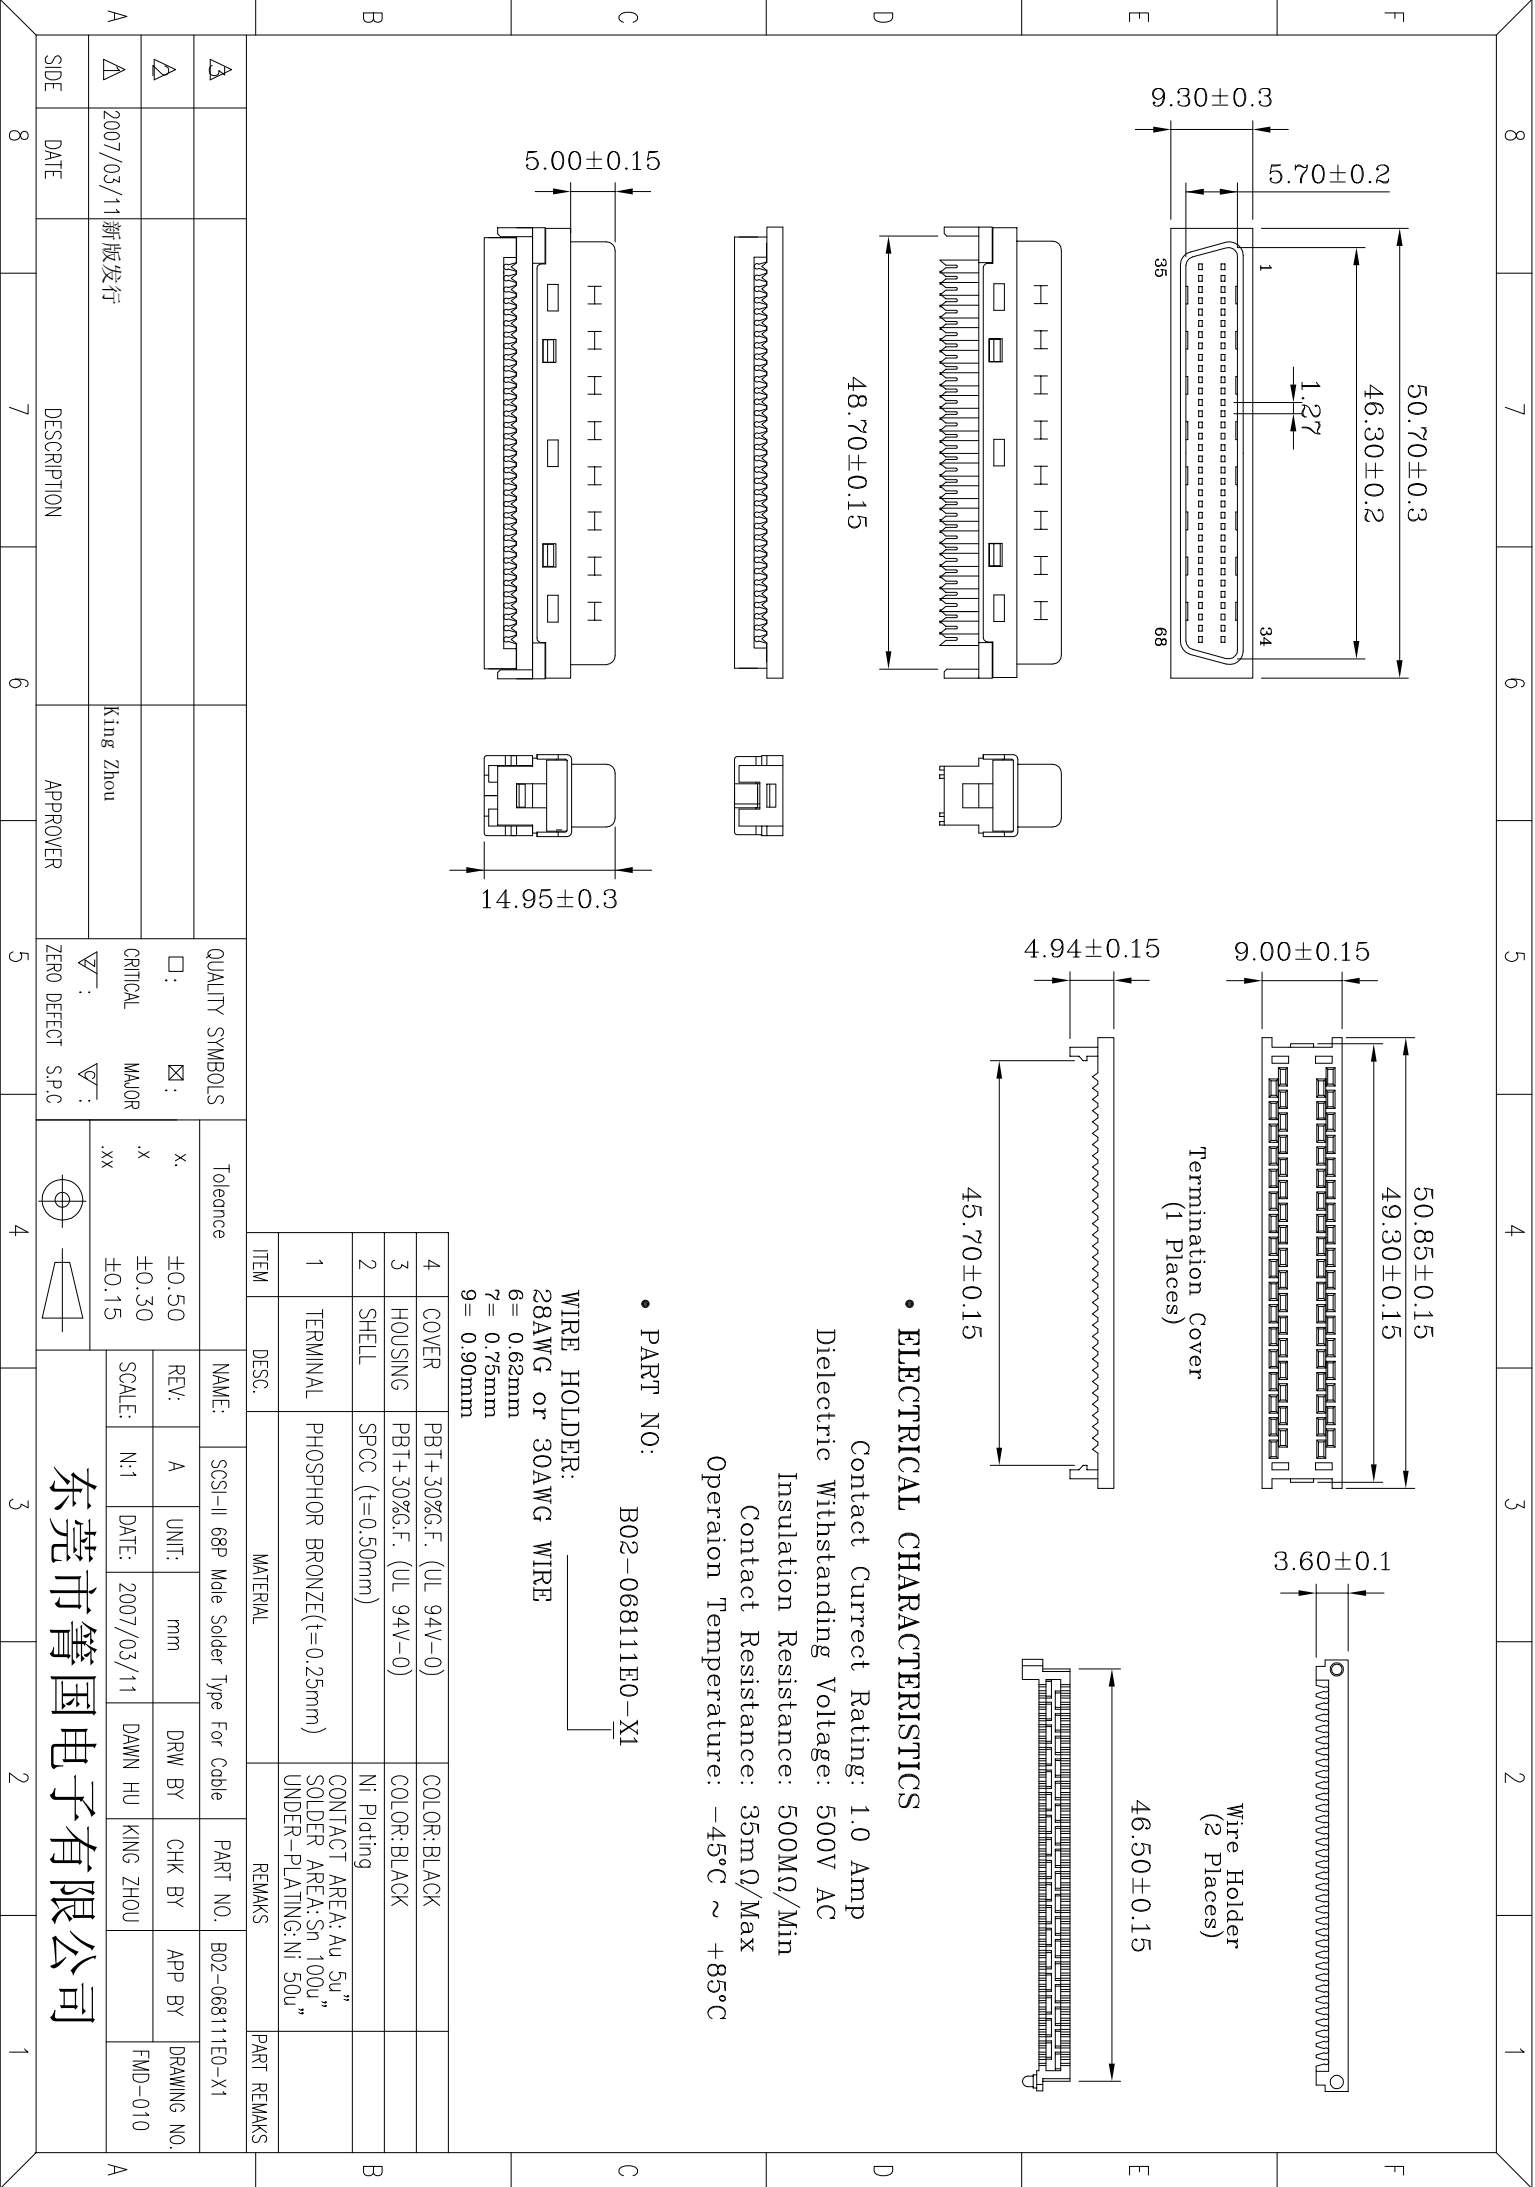

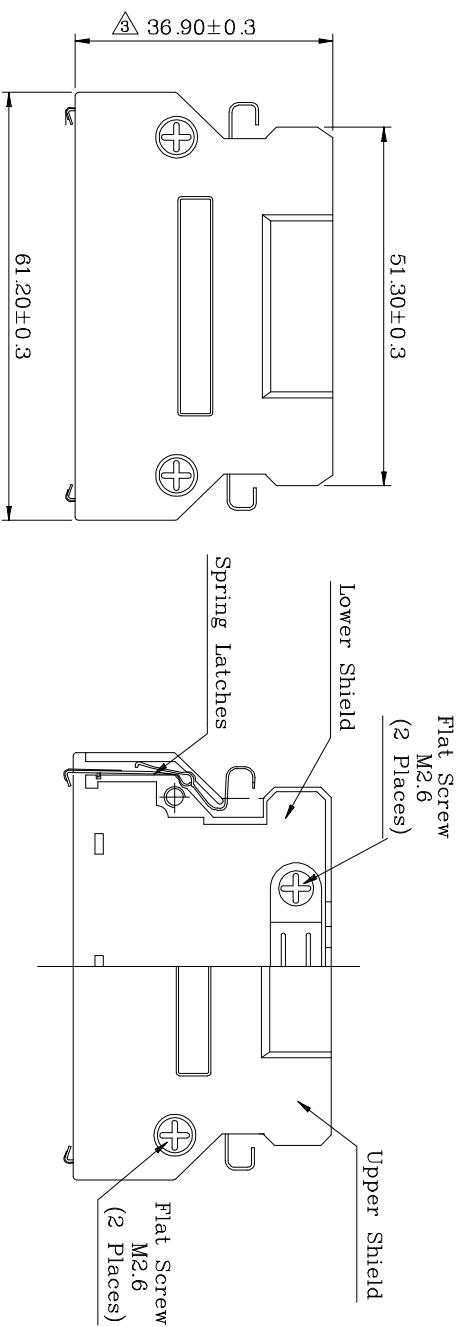

- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω Max
- Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$




PART NO:

BXX-068NN8N3-XX

SPECIFICATION:
02:HPDB
03:HPCN

ENTRY HOLE SIZES:

1A:ø10.0
1D:ø14.0
2D:24mm方型孔 2*4

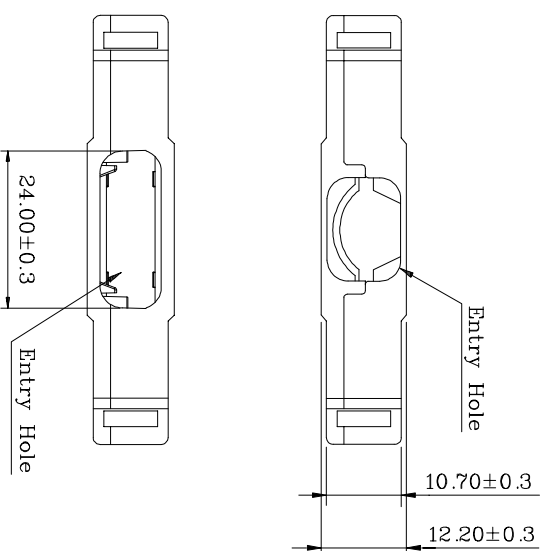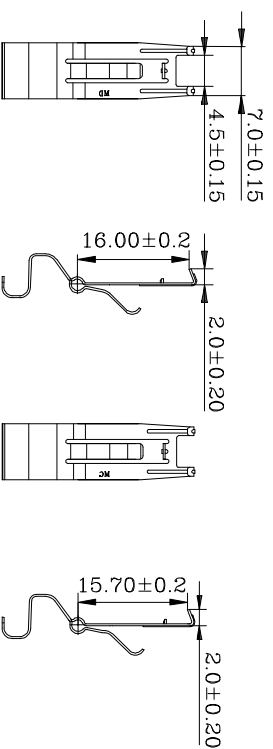

《HPDB》

《HPGN》

B		B	
《 HPDB 》		《 HPCN 》	
4	SPRING LATCH	STAINLESS STEEL	
3	CABLE CLIPPER	STEEL	PLATING:NI
2	FLAT SCREWS	STEEL	PLATING:NI
1	BACK SHELL	ZINC ALLOY	PLATING:NI
ITEM	DESC.	MATERIAL	REMARKS
			PART REMARKS

				QUALITY SYMBOLS	Tolerance	NAME: SCS 68P Male ZINC Hood Latch Type PART NO. BXX-068NN8N3-XX							
				☐ : ☒ :	x. ±0.50	REV: A	UNIT: mm	DRW BY	CHK BY	APP BY	DRAWING NO.		
				CRITICAL MAJOR	.x ±0.30	SCALE: N:1	DATE: 2012/07/22	JINGLI	KING ZHOU		BXX-A09		
A	Δ	2012/07/22	NEW ISSUE	JINGLI	.xx ±0.25	东莞市箐国电子有限公司							
SIDE	DATE	DESCRIPTION	APPROVER	☒ : ☒ :	 								
				ZERO DEFECT S.P.C									

东莞市箐围电子有限公司