
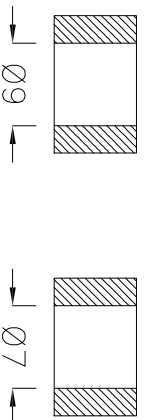


- NOTES:
1. PROTECTION LEVEL: IP67
 2. RATED CURRENT: 4 AMP
 3. RATED VOLTAGE: 250 V
 4. PLUG AND PULL TEST: 500 TIMES MIN.
 5. OPERATING TEMPERATURE: -40°C~+85°C
 6. CONTACT RESISTANCE: $\leq 3m\Omega$
 7. Connector plug-in conforms to IEC 61076-2-101
 8. All materials meet environmental requirements.
 9. CABLE CLAMP: ID6.0 \sim 8.0mm.

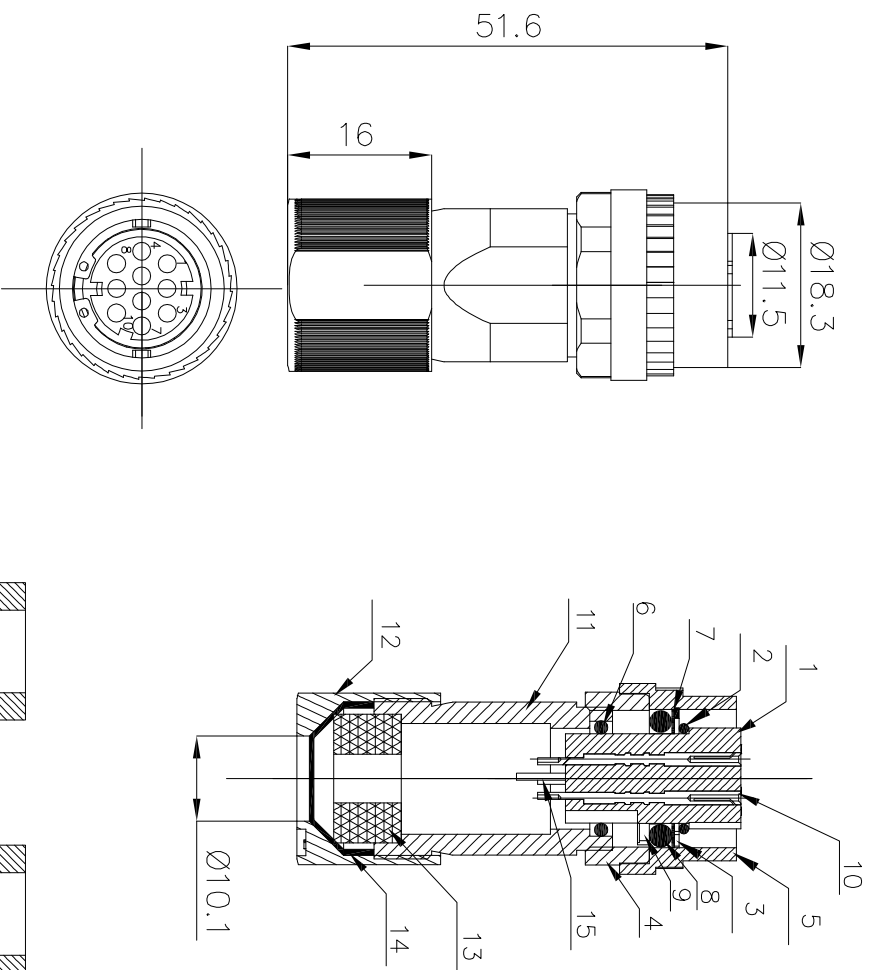

10	BACK NUT	ZINC ALLOY		
9	OUT SHELL	ZINC ALLOY		
10	Terminal	Copper		
9	Contact Shell	ZINC ALLOY		
8	Spring	Stainless steel		
7	Cover	PA66		
4,5	NUT	ZINC ALLOY		
3	Circlip	Stainless steel		
2,6	Seal ring	NBR	Au/G/F	
1	INSIDE SHELL	ZINC ALLOY		
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

QUALITY SYMBOLS

□: MAJOR

⊠: S.P.C

∇: ZERO DEFECT

Tolerance

x. ±0.50

.x ±0.30

.xx ±0.25

NAME: JAE-10P (FANUC) 伺服连接器

PART NO. JAE-10P-VT-S01

REV: A

UNIT: mm

DRW BY: JINGLI

CHK BY: KING ZHOU

APP BY:

DRAWING NO. JAE-10P

SCALE: N:1

DATE: 2021/07/06

JINGLI

KING ZHOU

DATE: 2021/07/06

DESCRIPTION: NEW ISSUE

APPROVER: JINGLI

ZERO DEFECT

东莞市箐国电子有限公司