

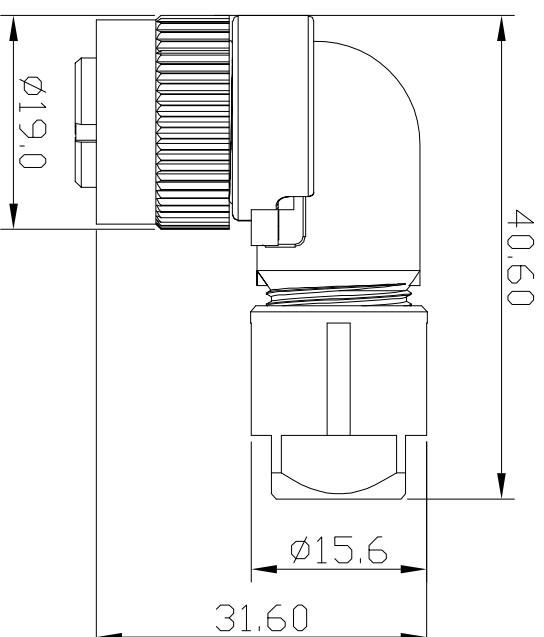


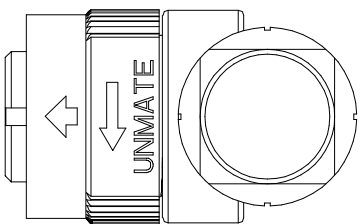

- NOTES:
1. PROTECTION LEVEL: IP67
 2. RATED CURRENT: 4 AMP
 3. RATED VOLTAGE: 250 V
 4. PLUG AND PULL TEST: 500 TIMES MIN..
 5. OPERATING TEMPERATURE: -40°C~+85°C
 6. CONTACT RESISTANCE: $\leq 3m\Omega$
 7. Connector plug-in conforms to IEC 61076-2-101
 8. All materials meet environmental requirements.
 9. CABLE CLAMP: ID6.0~8.0mm.

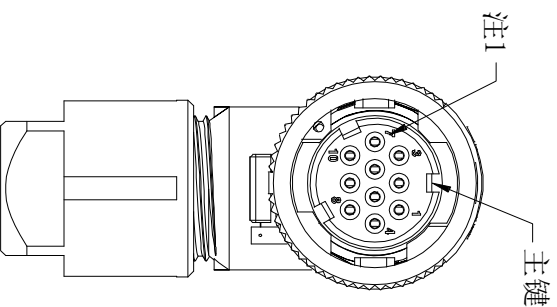

10	BACK NUT	PA		
9	CABLE CLAMP	PA		
8	A SEAL	NBR		
7	BACK SHELL	PA		
6	SCREW	Stainless steel		
5	Seal ring	NBR		
4	CONNECTING NUT	PA		
3	HOOD	PA		
2	TERMINAL	COPPER ALLOY	Au/G/F	
1	HOUSING	PA		
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

NOTES:

1. PROTECTION LEVEL: IP67
2. RATED CURRENT: 4 AMP
3. RATED VOLTAGE: 250 V
4. PLUG AND PULL TEST: 500 TIMES MIN.
5. OPERATING TEMPERATURE: -40°C~+85°C
6. CONTACT RESISTANCE: $\leq 3m\Omega$
7. Connector plug-in conforms to IEC 61076-2-101
8. All materials meet environmental requirements.
9. CABLE CLAMP: ID6.0~8.0mm.

10	BACK NUT	PA		
9	CABLE CLAMP	PA		
8	A SEAL	NBR		
7	BACK SHELL	PA		
6	SCREW	Stainless steel		
5	Seal ring	NBR		
4	CONNECTING NUT	PA		
3	HOOD	PA		
2	TERMINAL	COPPER ALLOY	Au/G/F	
1	HOUSING	PA		
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

NAME:	JAE-10P (FANUC) 伺服连接器	PART NO.	JAE-10P-RA-HS01
-------	-----------------------	----------	-----------------

[illegible]

东莞市箐国电子有限公司
www.kinkuo.com

www.kinkyo.com