
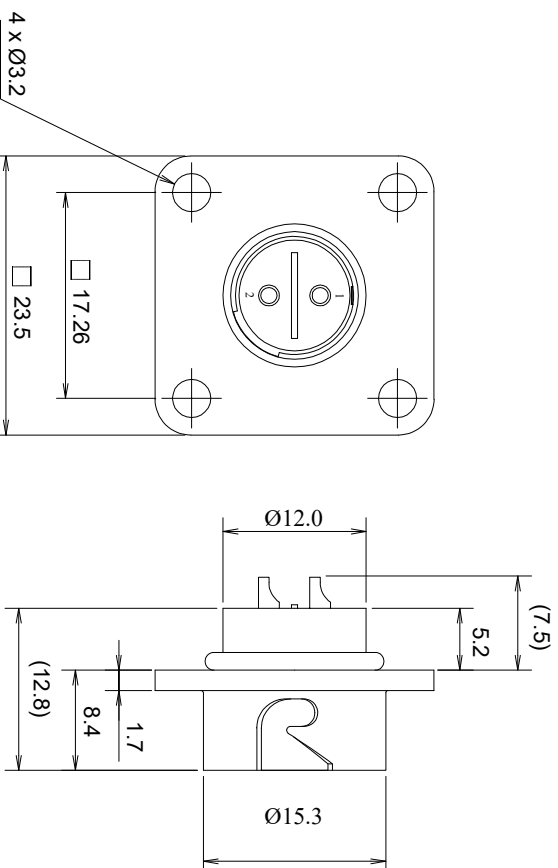


Main Key Position Mark

Material:

Pin Front Insulator:	Synthetic Rubber/Black
Pin Rear Insulator:	Plastic(UL94V-0)/Black
Pin Contact:	Copper Alloy/Gold Plating
O Ring(Mounting Side) :	Synthetic Rubber/Black
Receptacle Shell:	Zinc Alloy/Nickel Plating
Retaining Ring:	Copper Alloy/Gold Plating
Ground Lug:	Copper Alloy/Gold Plating

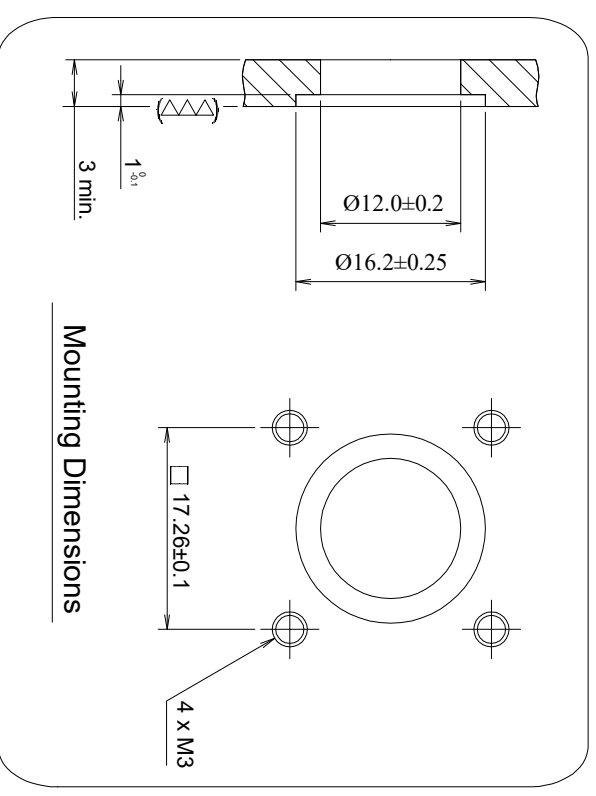

Mounting Dimensions

Pin contact style only
Soldering termination only
Conductor size: 20 AWG Max.
Individually waterproof

SPECIFICATIONS

Rated Current: 3A Max. / Contact
Rated Voltage: 200V AC(r.m.s.) Max.
Dielectric Withstanding Voltage:
1500V AC(r.m.s.) / 1 minute (2Pin)
900V AC(r.m.s.) / 1 minute (10Pin)
Insulation Resistance: 1000M Ω Min. at 500V DC
Operating Temperature Range: -25 $^{\circ}$ C to +85 $^{\circ}$ C
Conductor Size: # 22

Protection Rate: IP67 when mated (Receptacle : Individually waterproof)

NAME:	CM10 2Pin Socket For Panel Mount	PART NO.	B01-CM10R2P(D3)-01
-------	----------------------------------	----------	--------------------

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. B01-CM10
SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jack Chen		


东莞市箐国电子有限公司
www.KinKuo.com