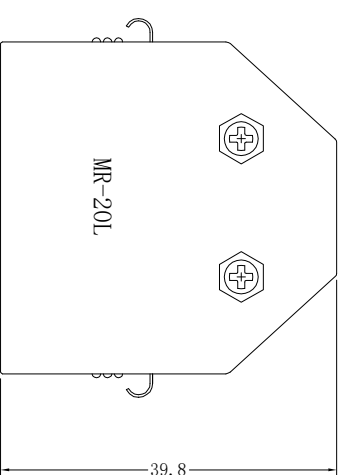
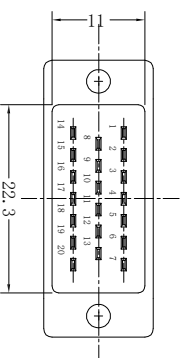


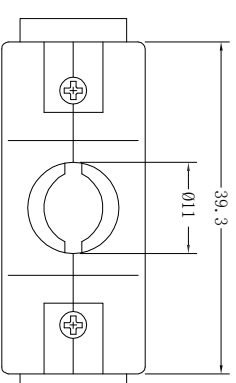
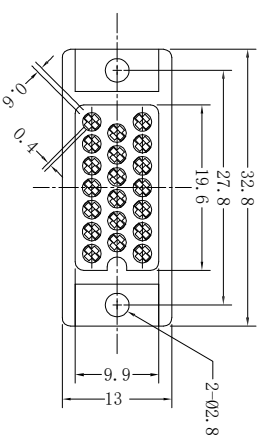


C			
		Phosphor Bronze	Tin Plate Over Nickel
⑧	Contacts	PBT	UL 94V-0 Blue
⑦	Insulator		Nickel Plating
⑥	Hexgon nut	Spcc	Nickel Plating
⑤	Small-sized phillips head screw	Spcc	Nickel Plating
④	Cable clamp	Spcc	Nickel Plating
③	Locking screw	Spcc	Nickel Plating
②	Spring lock	SUS	304
①	Case body	ABS+PC	UL 94V-0 GREY
ITEM	PART NAME	MATERIALS	NOTE

PART NAME:	MR-20L Female Servo Connector For Cable	PART NO:	B01-MR20FS01-01
------------	---	----------	-----------------

QUALITY SYMBOLS

Tolerance
x. ± 0.60

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING N MR-20L
SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jock Chen		

A	2018/03/11	NEW ISSUE	Jack Chen
Δ			
SIDE	DATE	DESCRIPTION	APPROVER

CRITICAL	MAJOR
▽ : ▽	▽ :
ZERO DEFECT	S.P.C.

	.x	± 0.40
	.xx	± 0.25

 KinKuo
东莞市箐国电子有限公司
www.KinKuo.com

Electrical Characteristics:

Rated voltage: 300V AC / r.m.s

Rated current: 3A / pin

Contact Resistance: 30mΩ max. at DC 100mA

Insulator Resistance: 1000M Ω max. at DC 100mA

Withstanding Voltage: 1000V AC / r.m.s 50Hz For 1 minute

Operating Temperature: $-55^{\circ} \sim +105^{\circ}$