
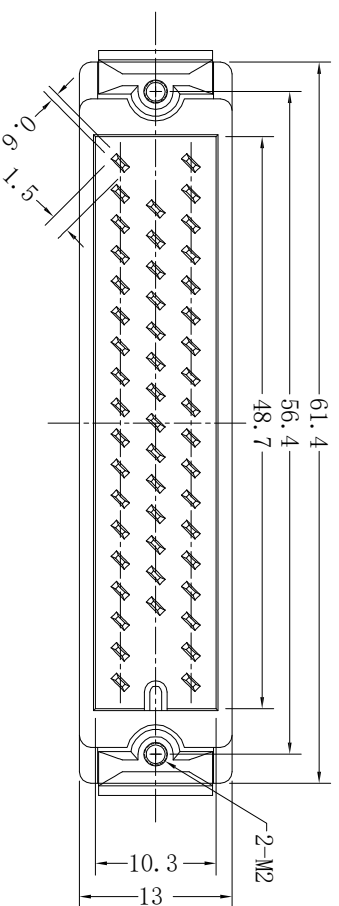
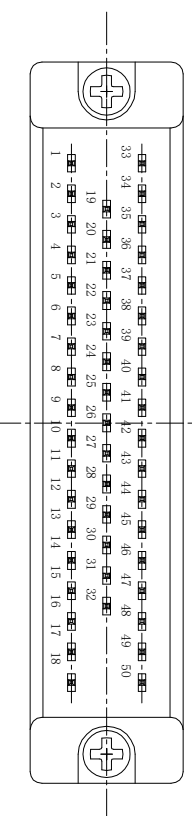



P.C.B Layout

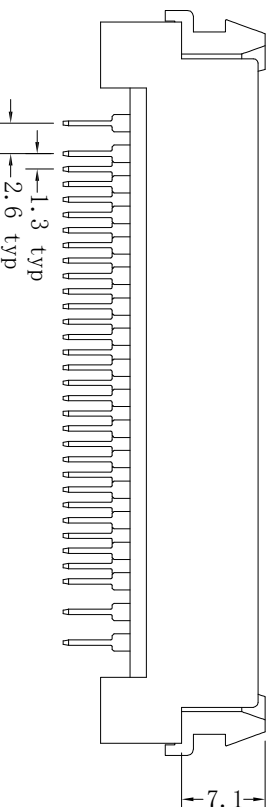

Electrical Characteristics:

Rated voltage: 300V AC / r.m.s

Rated current: 3A / pin

Contact Resistance: 30m

Insulator Resistance: 1000MΩmax. at DC 100mA

Withstanding Voltage: 1000V AC / r.m.s 50Hz For 1 minute

Operating Temperature: $-55^{\circ} \sim +105^{\circ}$

ITEM	PART NAME	MATERIALS	NOTE
⑤			
④	Contacts	Phosphor Bronze	Tin Plate Over Nickel
③	Insulator	PBT	UL 94V-0 Blue
②	Locking block	ZINC Alloy	Nickel Plating
①	Small-sized phillips head screw	Spcc	Nickel Plating

PART NAME:	MR-50L Male Servo Connector V/T For PCB	PART NO:	B01-MR50MLVT-01
------------	---	----------	-----------------

[illegible][illegible]

A					
Δ	2018/03/11	NEW ISSUE		Jack Chen	
SIDE	DATE	DESCRIPTION		APPROVER	
		CRITICAL	MAJOR	.x	±0.40
		▽:	▽:	.xx	±0.25
		ZERO DEFECT S.P.C			



东莞市箐国电子有限公司
www.kinkuo.com