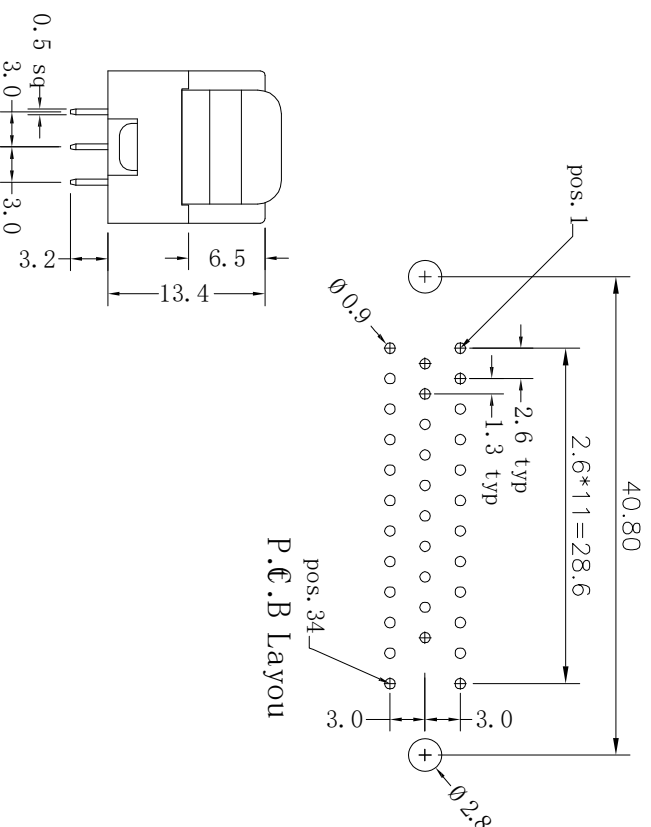
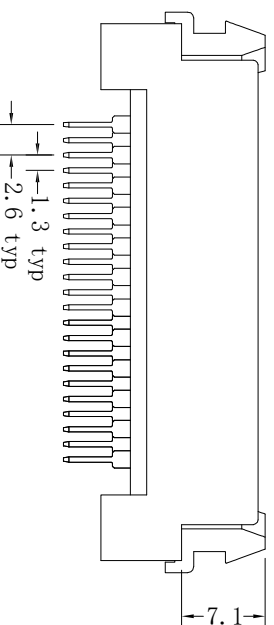
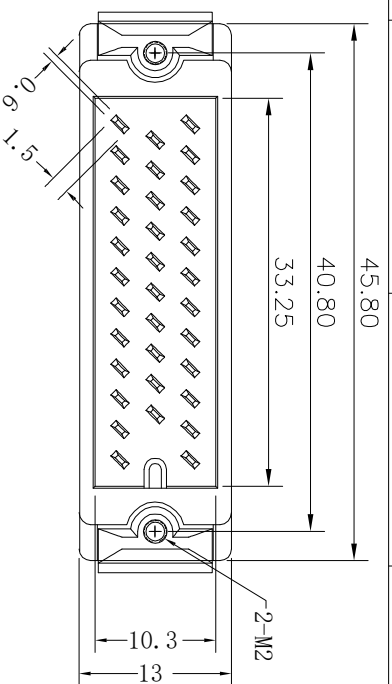


Electrical Characteristics:
Rated voltage: 300V AC / r.m.s
Rated current: 3A / pin
Contact Resistance: 30mΩ max. at DC 100mA
Insulator Resistance: 1000MΩmax. at DC 100mA
Withstanding Voltage: 1000V AC / r.m.s 50Hz For 1 minute
Operating Temperature: -55° ~ +105°

ITEM	PART NAME	MATERIALS	NOTE
⑤			
④	Contacts	Phosphor Bronze	Tin Plate Over Nickel
③	Insulator	PBT	UL 94V-0 Blue
②	Locking block	ZINC Alloy	Nickel Plating
①	Small-sized phillips head screw	Spcc	Nickel Plating

PART NAME:	MR-34L Male Servo Connector V/T For PCB	PART NO:	B01-MR34MLVT-01
------------	---	----------	-----------------

QUALITY SYMBOLS

Tolerance

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO. MR-34L
SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jack Chen		

A			
Δ	2018/03/11	NEW ISSUE	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER

CRITICAL	MAJOR
<u>▽</u> :	<u>▽</u> :
ZERO DEFECT	S.P.C

	± 0.40	$\times$
	± 0.25	$.xx$