
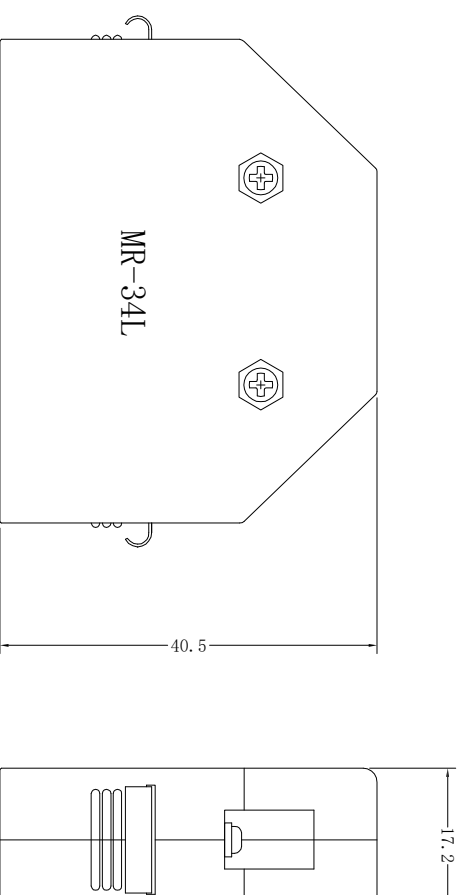


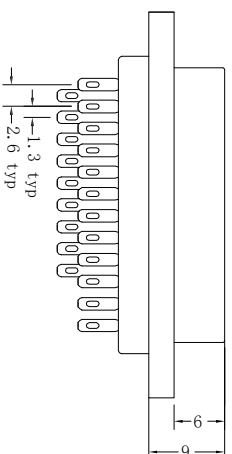
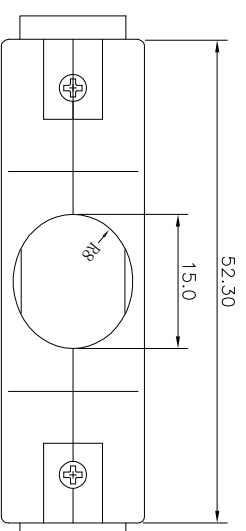


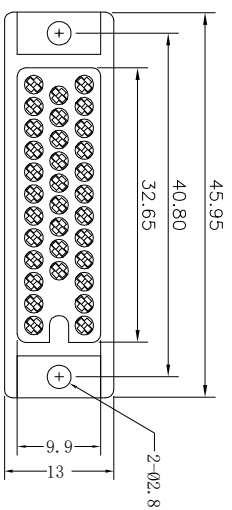

C	⑧	Contacts	Phosphor Bronze	Tin Plate Over Nickel
	⑦	Insulator	PBT	UL 94V-0 Blue
	⑥	Hexagon nut	Spcc	Nickel Plating
	⑤	Small-sized phillips head screw	Spcc	Nickel Plating
	④	Cable clamp	Spcc	Nickel Plating
	③	Locking screw	Spcc	Nickel Plating
B	②	Spring lock	SUS	304
	①	Case body	ABS+PC	UL 94V-0 GREY
ITEM		PART NAME	MATERIALS	NOTE

Electrical Characteristics: Rated voltage: 300V AC / r.m.s Rated current: 3A / pin Contact Resistance: 30mΩ max. at DC 100mA Insulator Resistance: 1000MΩmax. at DC 100mA Withstanding Voltage: 1000V AC / r.m.s 50Hz For 1 minute Operating Temperature: -55° ~+105°			
PART NAME:	MR-34L Female Servo Connector For Cable	PART NO:	B01-MR34FS01-01

A				
Δ	2018/03/11	NEW ISSUE		Jack Chen
SIDE	DATE	DESCRIPTION		APPROVER

QUALITY SYMBOLS	Tolerance						
☐ :	☒ :	x.	±0.60				
CRITICAL	MAJOR	.x	±0.40				
☒ :	☒ :	.xx	±0.25				
ZERO DEFECT	S.P.C						
 东莞市箐国电子有限公司 www.kinkuo.com							
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO
SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jack Chen		MR-34L

Electrical Characteristics:

Rated voltage: 300V AC / r.m.s

Rated current: 3A / pin

Contact Resistance: 30mΩ max. at DC 100mA

Insulator Resistance: 1000M Ω max. at DC 100mA

Withstanding Voltage: 1000V AC / r.m.s 50Hz For 1 minute

Operating Temperature: $-55^{\circ}\sim +105^{\circ}$