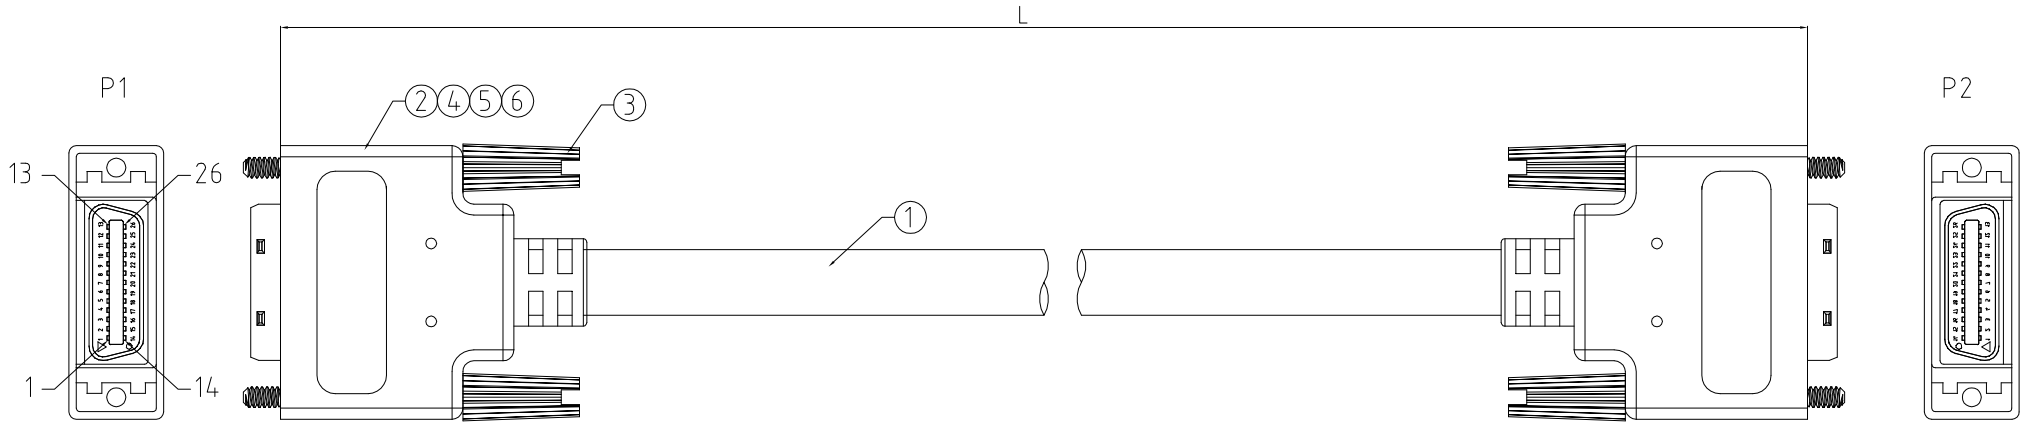

Wire Assignment:

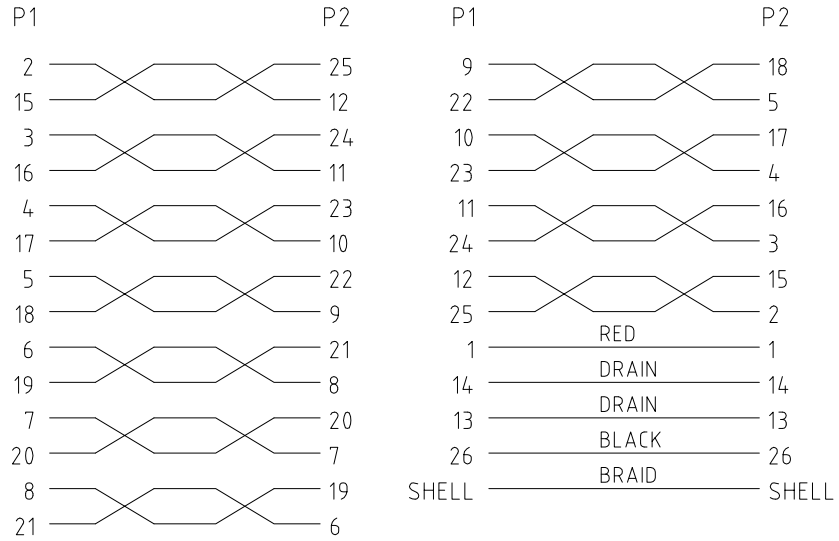

Length and Part number:

No.	Part No:	LENGTH(MM)
1	WAK-V002-02A	2000±30
2	WAK-V002-03A	3000±50
3	WAK-V002-05A	5000±50

NOTES:
1. OPEN/SHORT/INTERMITTENCE:100% TEST
2. DIELECTRIC WITHSTAND:AC100V/1MIN.
3. INSULATION RESISTANCE:DC 100V/10MΩ (MIN)
4. CONDUCTIVE RESISTANCE:See TABLE A

ITEM	MATERIAL	DESCRIPTION	Q'TY	UNIT
①	CABLE	UL 20276 (28AWG+AL)x11P+24AWG×2C+D×2C+AB OD:9.0MM Jacket:Black PVC	1	PCS
②	CONN	MDR 26P Male PIN:5U" Insulatin:Black Shell:NI	2	PCS
③	Screw	#4-40 Thumbscrew L=44MM	4	PCS
④	Inner Mold	LD-PE	N/A	KG
⑤	Over Mold	BLACK PVC	N/A	KG
⑥	Copper Foil	Copper Foil	N/A	MM

SIDE	DATE	DESCRIPTION	APPROVER
A	2024/03/22	NEW ISSUE	Jack Chen

QUALITY SYMBOLS
□: CRITICAL
⊠: MAJOR
▽: ZERO DEFECT
▽: S.P.C

Toleance	
x.	±0.60
.x	±0.40
.xx	±0.25

PART NAME:	MDR-26P Industrial Camera Link Cable				PART NO:	WAK-V002-XXA	
REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2024/03/22	Huangmei	Jack Chen		WAK-V002

KinKuo 东莞市箐国电子有限公司
www.KinKuo.com