
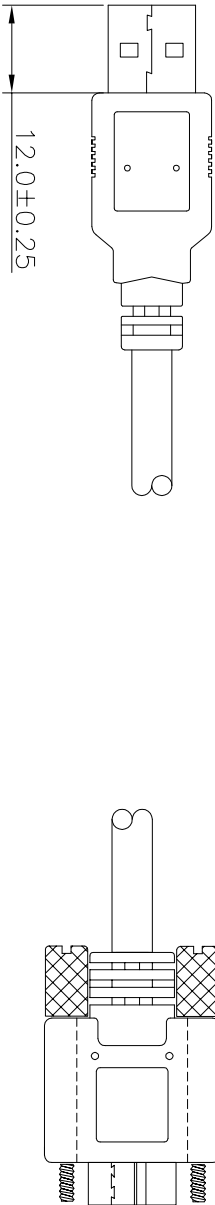



RoHS

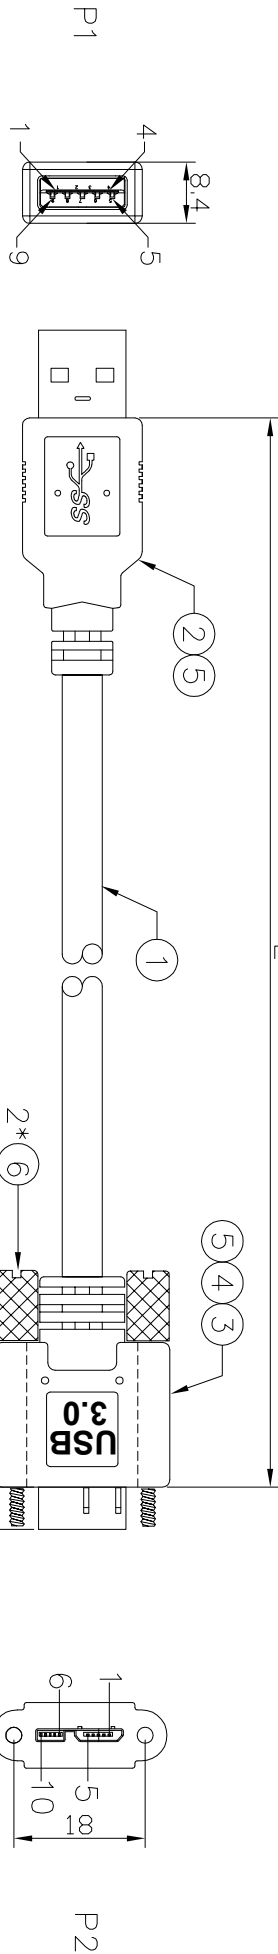

Length and Part number:

No	Part No:	Length (MM)
1	LKU30AMRM03-2.0M	2000±30
2	LKU30AMRM03-3.0M	3000±35
3	LKU30AMRM03-5.0M	5000±50
5	LKU30AMRM03-8.0M	8000±100
6	LKU30AMRM03-10.0M	10000±150

- NOTE:
1. 100% OPEN & SHORT WIRE TEST;
 2. CONTACT RESISTANCE 2ohm Max;
 3. INSULATION RESISTANCE 10M ohm Min;
 4. HI-POT DC 300V;

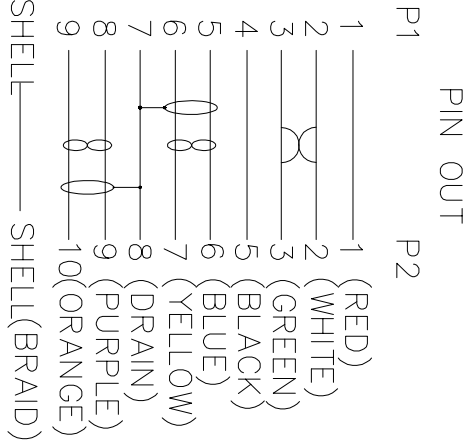

6	Screw 5.6*34MM M2.6	2PCS
5	PVC 50P BLACK	30G
4	PE	10G
3	USB(3.0)MICRO B Type Male Connector G/F Black	1PCS
2	USB(3.0) A Type Male Connector G/F Color Blue	1SET
1	UL20276 (USB3.0) (1P#28+DAM)*2C+2C#24+1P#28+AEB(AL) OD:6.5MM Color Purple	1PCS

NO.	MATERIAL.P/N	DESCRIPTION	Q'TY	VENDOR
-----	--------------	-------------	------	--------

PART	NAME:	PART	NAME:
------	-------	------	-------

		QUALITY SYMBOLS	
		□: ☒:	
		CRITICAL MAJOR	
		∇: ∇:	
		ZERO DEFECT S.P.C	

A	2024/03/22	NEW ISSUE	Jack Chen
SIDE	DATE	DESCRIPTION	APPROVER



东莞市箐国电子有限公司

www.kinkuo.com