


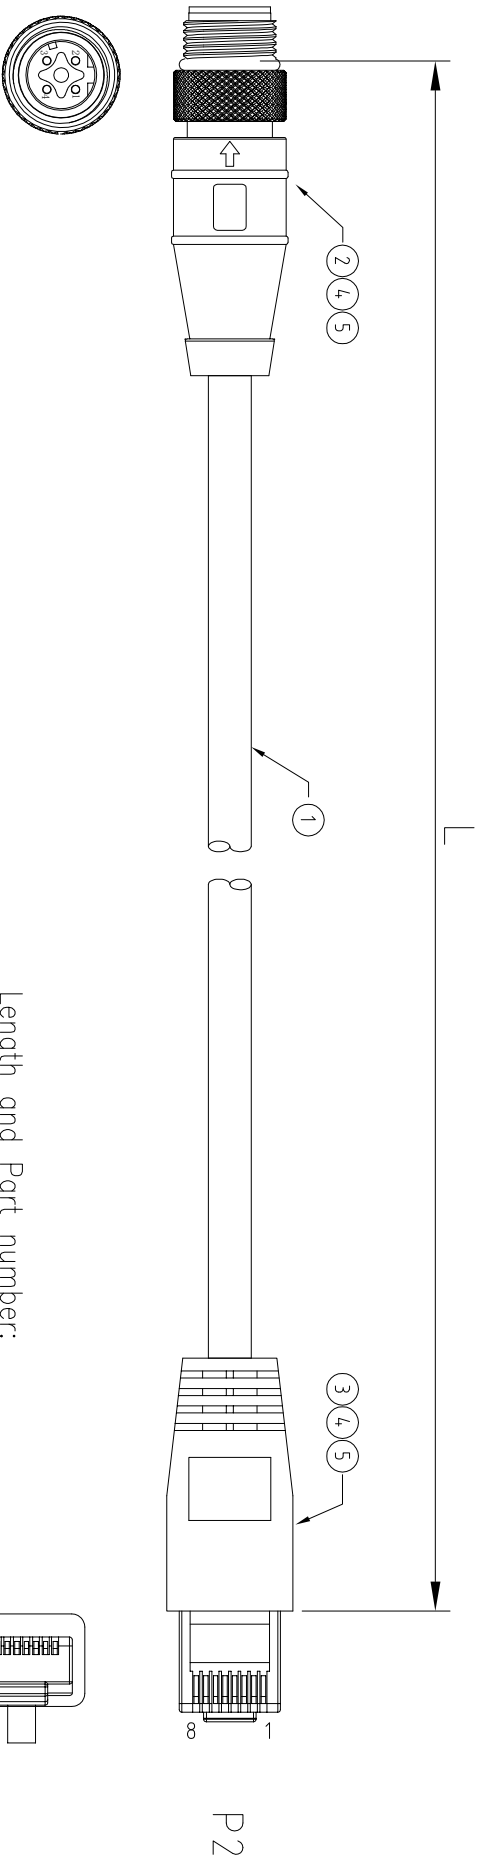

PIN ASSIGNMENT

P1	P2	WIRE
1	8	WHITE ORANGE
2	6	ORANGE
3	7	WHITE GREEN
4	3	GREEN
SHELL		SHELL

Length and Part number:

No	Part No:	Length (mm)
1	A15-080M1201-2.0M	2000±30
2	A15-080M1201-3.0M	3000±35
3	A15-080M1201-5.0M	5000±50
5	A15-080M1201-8.0M	8000±100
6	A15-080M1201-10.0M	10000±150

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

5	PE	PE	NA
4	OVERMOLD	BLACK PVC 45P	NA
3	CONN	RJ45 CONNECTOR,8P8C.WITH SHELL	1PCS
2	CONN	M12-4P Male D-Coded Connector(B10-M120104D-01)	1PCS
1	CABLE	CAT 5E 26AWG*2P STTP,JACKET:PVC COLOR:blackish Green, OD= 6.0mm	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

[illegible]