


RoHS

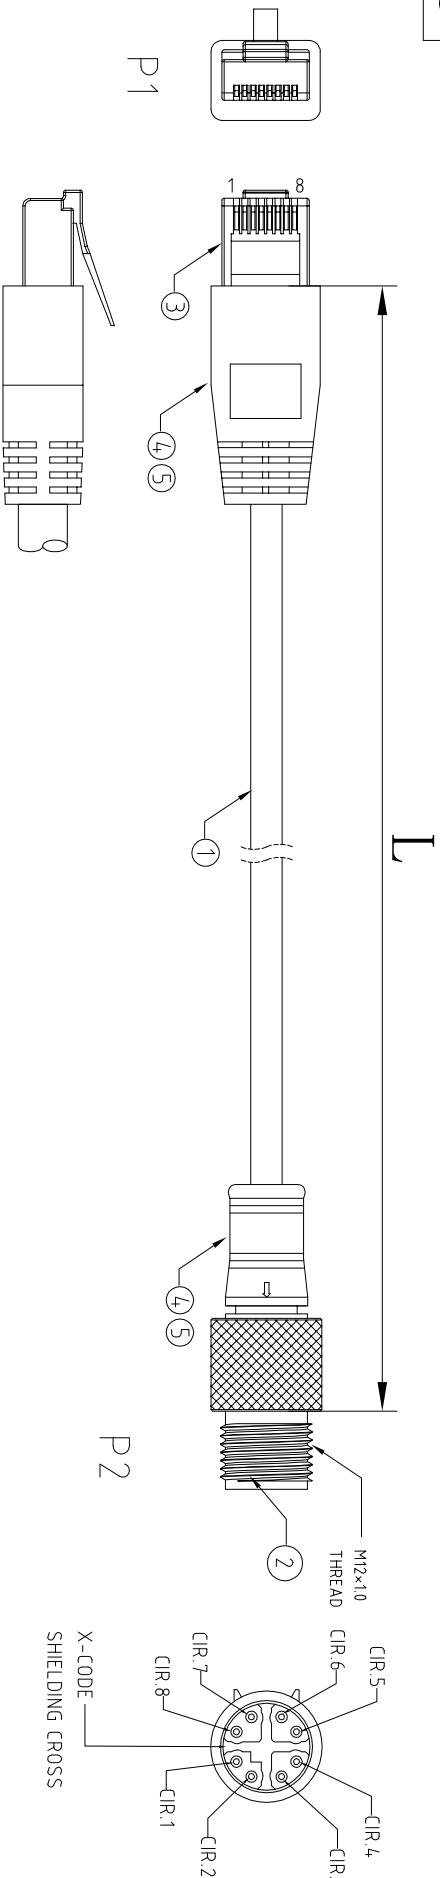

PIN ASSIGNMENT

P1	P2	WIRE COLOR
1	6	WHITE ORANGE
2	5	ORANGE
3	4	WHITE GREEN
4	7	BLUE
5	8	WHITE BLUE
6	3	GREEN
7	2	WHITE BROWN
8	1	BROWN
SHELL		SHELL

Length and Part number:

No	Part No:	Length (MM)
1	A15-080M1202-2.0M	2000±30
2	A15-080M1202-3.0M	3000±35
3	A15-080M1202-5.0M	5000±50
5	A15-080M1202-8.0M	8000±100
6	A15-080M1202-10.0M	10000±150

NOTES:

- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
- CONDUCTOR RESISTANCE: 5 OHMS MAX.
- INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
- THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

				QUALITY SYMBOLS		Tolerance		CRITICAL MAJOR ZERO DEFECT S.P.C							
Δ	2024/03/22	NEW ISSUE		Jack Chen				CRITICAL MAJOR ZERO DEFECT S.P.C							
SIDE	DATE	DESCRIPTION		APPROVER											
8		7		6		5		4		3		2		1	

5	PE	PE	NA
4	OVERMOLD	BLACK PVC 45P	NA
3	CONN	RJ45 CONNECTOR,8P8C.WITH SHELL	1PCS
2	CONN	M12-8P Male X-Coded Connector(1102-M12-108X016)	1PCS
1	CABLE	CAT 5E 26AWG*4P STTP JACKET:PVC COLOR:blackish Green, OD= 6.5mm	1PCS
ITEM		PART NAME	DESCRIPTION

PART NAME:		M12-8P X-Coded Industrial Camera Cable			PART NO:		A15-080M1202-xxM		
REV:		A	UNIT:	mm	DRW BY		CHK BY	APP BY	DRAWING NO. A15-080
SCALE:		N:1	DATE:	2024/03/22	Huangmei		Jack Chen		



东莞市箐国电子有限公司

www.kinkuo.com