


RoHS

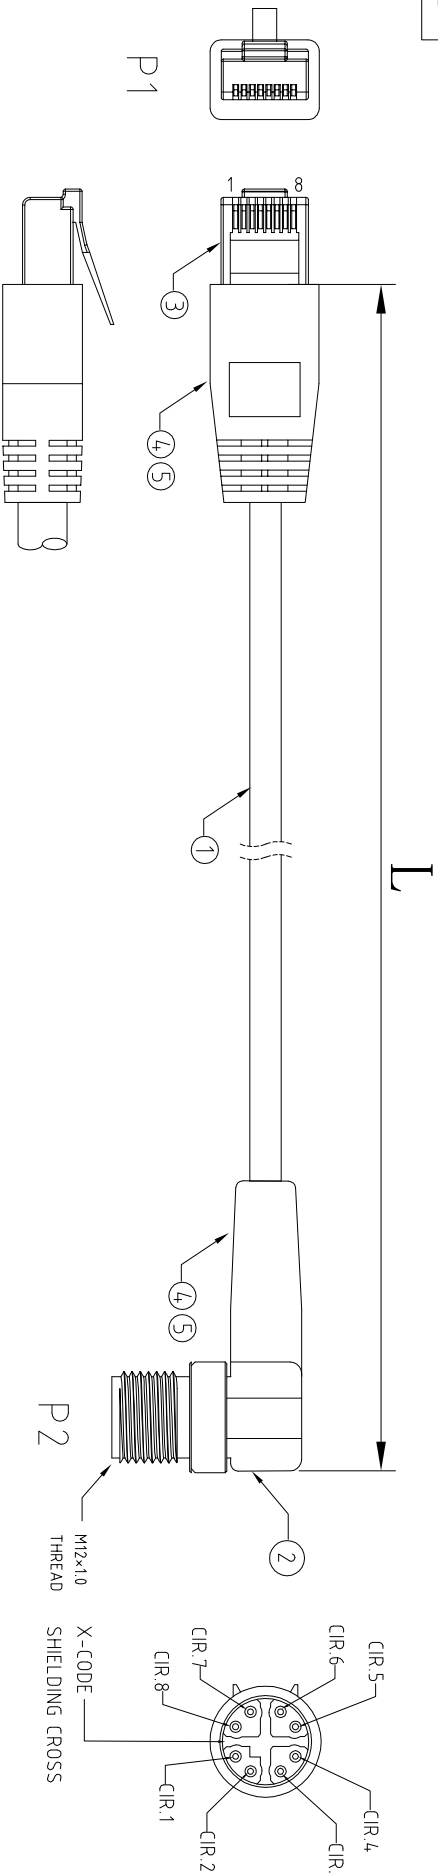

PIN ASSIGNMENT

P1	P2	WIRE COLOR
1	6	WHITE ORANGE
2	5	ORANGE
3	4	WHITE GREEN
4	7	BLUE
5	8	WHITE BLUE
6	3	GREEN
7	2	WHITE BROWN
8	1	BROWN
SHELL		SHELL

Length and Part number:

No	Part No:	Length (MM)
1	A15-080M1204-2.0M	2000±30
2	A15-080M1204-3.0M	3000±35
3	A15-080M1204-5.0M	5000±50
5	A15-080M1204-8.0M	8000±100
6	A15-080M1204-10.0M	10000±150

NOTES:

- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
- CONDUCTOR RESISTANCE: 5 OHMS MAX.
- INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
- THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

5	PE	PE	NA
4	OVERMOLD	BLACK PVC 45P	NA
3	CONN	RJ45 CONNECTOR,8P8C,WITH SHELL	1PCS
2	CONN	M12-8P Male X-Coded Connector(L102-M12-108X016)	1PCS
1	CABLE	CAT 5E 26AWG*4P SFTP,JACKET:PVC COLOR:blackish Green, OD= 6.5mm	1PCS
ITEM	PART NAME	DESCRIPTION	QY'T

QUALITY SYMBOLS	
□ :	☒ :
CRITICAL	MAJOR
▽ :	▽ :
ZERO DEFECT	S.P.C

Tolerance	
X.	±0.60
.X	±0.40
.XX	±0.25
	

REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
SCALE:	N:1	DATE:	2024/03/22	Huangmei	Jack Chen		A15-080



东莞市箐国电子有限公司

www.kinkuo.com