



RoHS

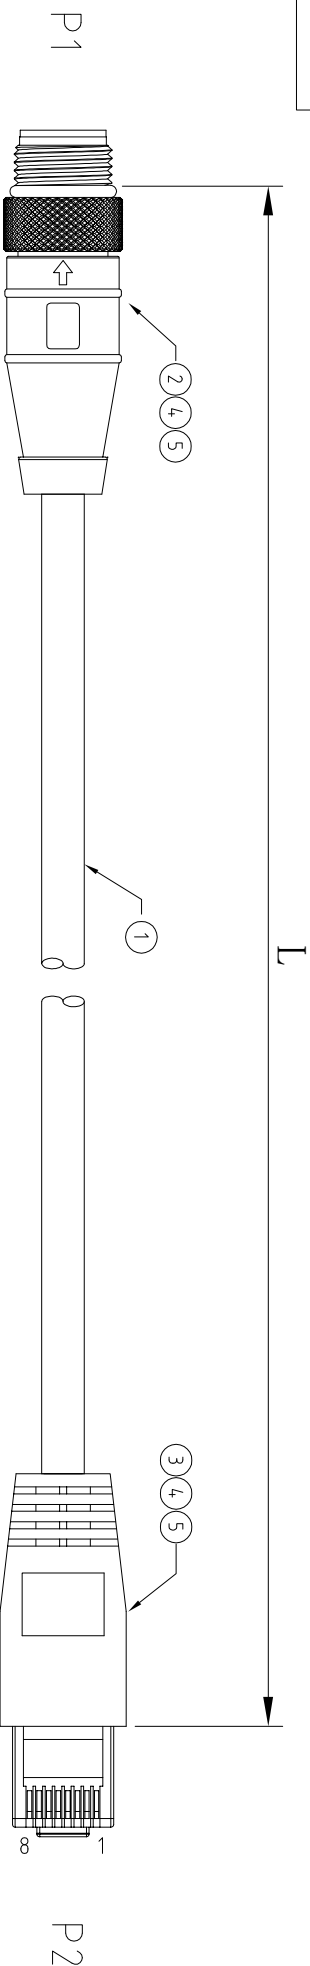

PIN ASSIGNMENT

P1	P2	WIRE COLOR
3	1	WHITE ORANGE
2	2	ORANGE
8	3	WHITE GREEN
1	4	BLUE
7	5	WHITE BLUE
5	6	GREEN
4	7	WHITE BROWN
6	8	BROWN
SHELL		SHELL

NOTES:

- ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
- CONDUCTOR RESISTANCE: 5 OHMS MAX.
- INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
- THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

Length and Part number:

No	Part No:	Length (MM)
1	A15-080M1203-2.0M	2000±30
2	A15-080M1203-3.0M	3000±35
3	A15-080M1203-5.0M	5000±50
5	A15-080M1203-8.0M	8000±100
6	A15-080M1203-10.0M	10000±150

5	PE	PE	NA
4	OVERMOLD	BLACK PVC 45P	NA
3	CONN	RJ45 CONNECTOR,8P8C.WITH SHELL	1PCS
2	CONN	M12-8P Male A-Coded Connector(L102-M12-T08X01G)	1PCS
1	CABLE	CAT 5E 26AWG*4P STTP JACKET:PVC COLOR:blackish Green, OD= 6.5mm	1PCS
ITEM	PART NAME	DESCRIPTION	QTY

PART NAME:	M12-8P X-Coded Industrial Camera Cable	PART NO:	A15-080M1203-xxM
------------	--	----------	------------------

QUALITY SYMBOLS		Tolerance	
☐ :	☒ :	x.	±0.60
☐ :	☒ :	.x	±0.40
☐ :	☒ :	.xx	±0.25
CRITICAL	MAJOR	 东莞市箐国电子有限公司 www.kinkuo.com	
ZERO DEFECT	S.P.C		

A		B		C		D		E		F	
SIDE		DATE		DESCRIPTION		APPROVER		8		7	
NEW ISSUE		2024/03/22		Jack Chen		8		7		6	
8		7		6		5		4		3	
1		2		3		4		5		6	