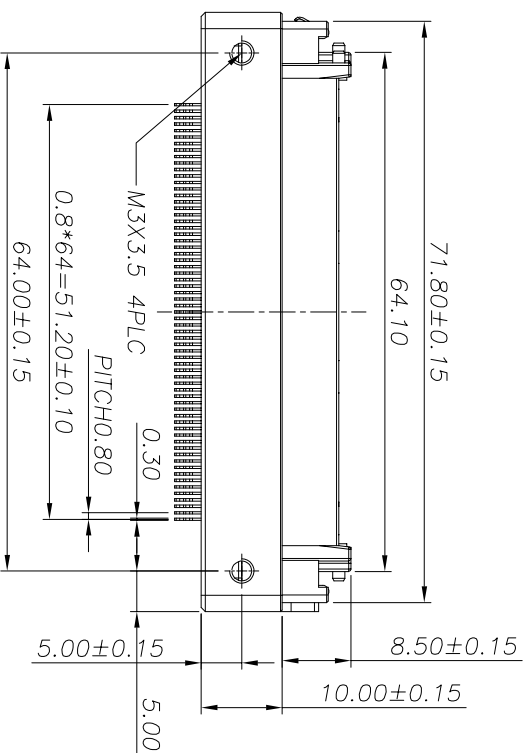
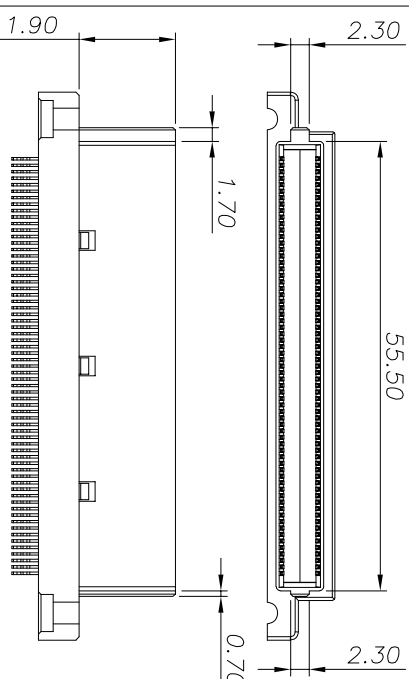

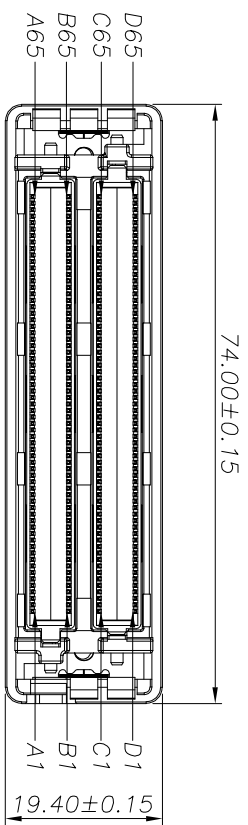


- SPECIFICATION:
1. RATED CURRENT: 0.30A/CONTACT
 2. INSULATION RESISTANCE: 500MOHM MIN.
 3. DIELECTRIC WITHSTANDING VOLTAGE:250V AC FOR 1 MINUTE.
 4. OPERATING TEMPERATURE: -25°C TO +85°C
