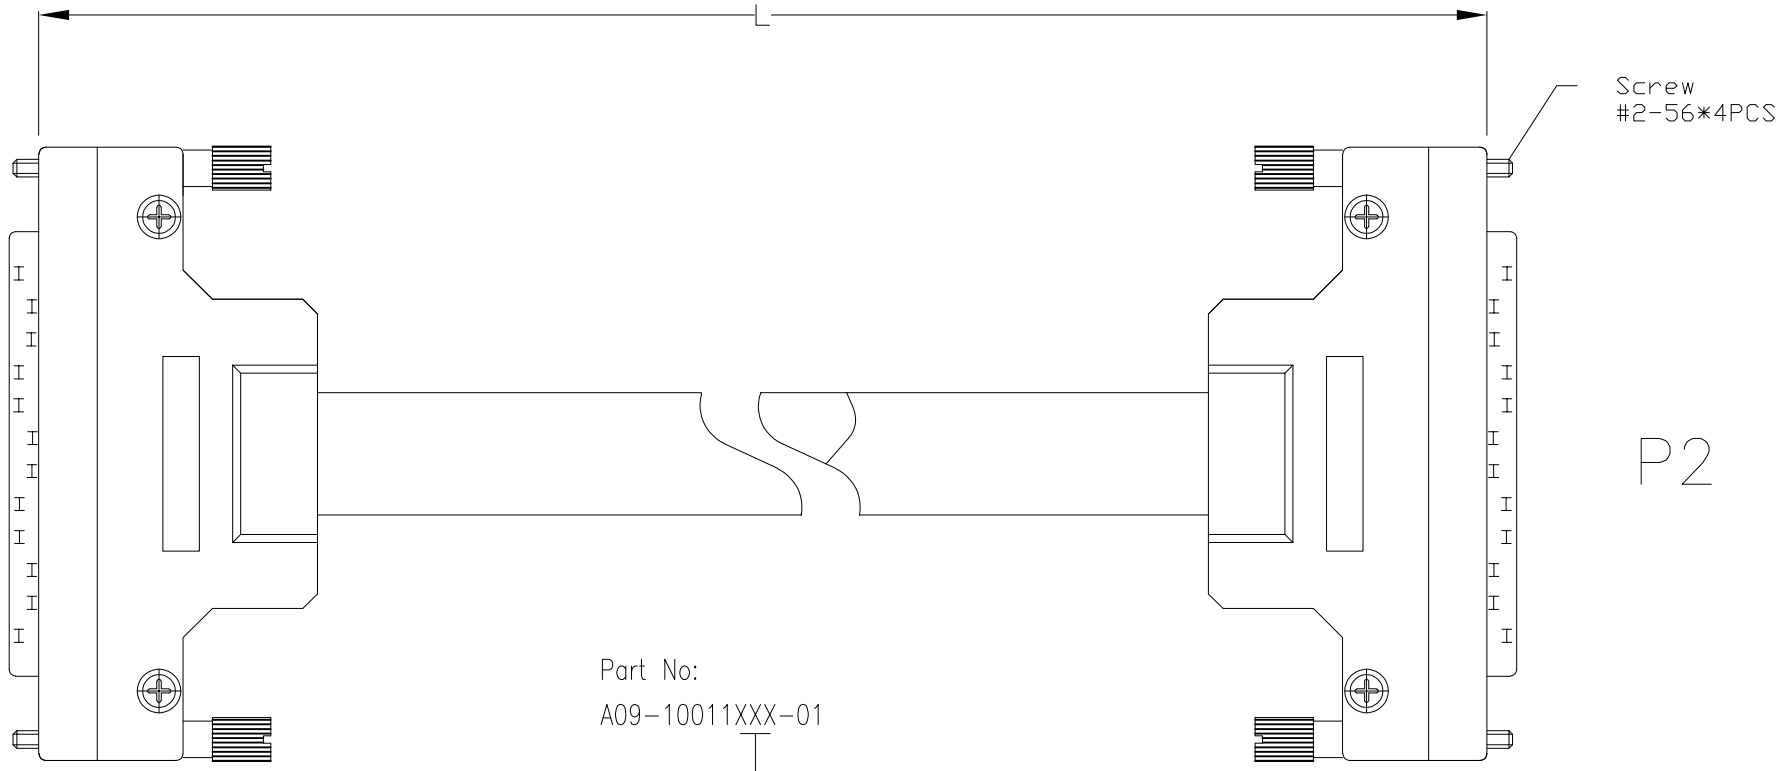


Part No:

A09-10011XXX-01

Wire length:

005= 0.5M
010= 1.0M
015= 1.5M
~~~
100= 10.0M

NOTES:

1. ELECTRICAL TEST: 100% OPEN, SHORT & MISS WIRE TEST.
2. CONDUCTOR RESISTANCE: 5 OHMS MAX.
3. INSULATOR RESISTANCE: 1M OHMS MIN, DC 300V 0.01sec.
4. THIS PRODUCT MEET ROHS STANDARD ENVIRONMENTAL PROTECTION POLICY.

| ITEM | PART NAME | DESCRIPTION | QY'T |
|---|---|---|---|
| 2 | CABLE | UL20276 28AWG*50P+AL+BRAID<br>PVC JACKET COLOR:BLACK OD= 11.5mm | 1PCS |
| 1 | CONNECTOR | HPDB SCSI 100Pin Male SCREW TYPE WITH ZINC HOOD | 2SET |

| SIDE | DATE | DESCRIPTION | APPROVER |
|---|---|---|---|
| A | 2025/02/10 | NEW ISSUE | Jack Chen |

QUALITY SYMBOLS

□: CRITICAL ⊠: MAJOR

▽: ZERO DEFECT ▽: S.P.C

Toleance

x. ±0.60
.x ±0.40
.xx ±0.25

| PART NAME: | SCSI DB 100Pin Male to Male Cable With Zinc Hood | | | | PART NO: | A09-10011XXX-01 | |
|---|---|---|---|---|---|---|---|
| REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| SCALE: | N:1 | DATE: | 2025/02/10 | Huangmei | Jack Chen | | A09-100 |

KinKuo 东莞市箐国电子有限公司

www.KinKuo.com
~~~

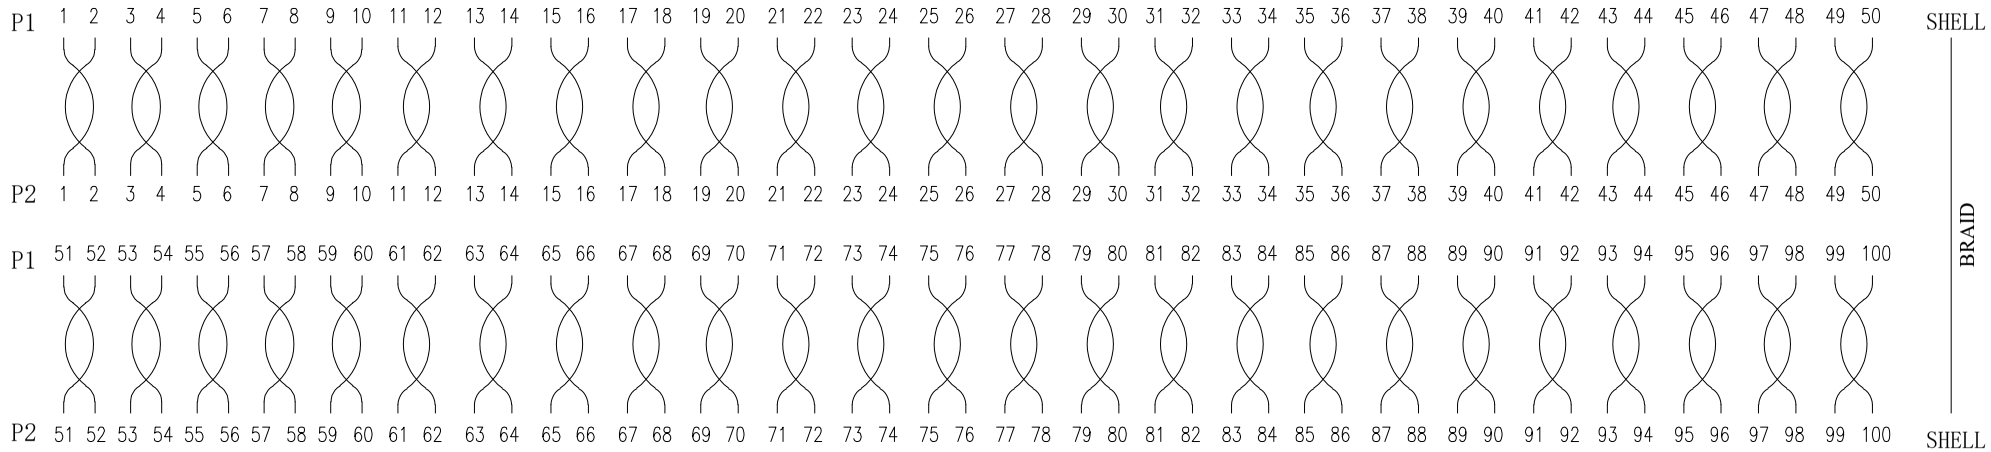





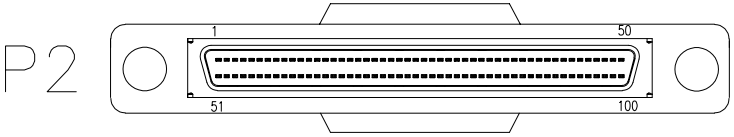


| ITEM | PART NAME | DESCRIPTION | QY'T |
|---|---|---|---|
| 2 | CABLE | UL20276 28AWG*50P+AL+BRAID<br>PVC JACKET COLOR:BLACK OD= 11.5mm | 1PCS |
| 1 | CONNECTOR | HPDB SCSI 100Pin Male SCREW TYPE WITH ZINC HOOD | 2SET |

| | | | |
|---|---|---|---|
| | | | |
| | | | |
| ⚠ | 2025/02/10 | NEW ISSUE | Jack Chen |
| SIDE | DATE | DESCRIPTION | APPROVER |

QUALITY SYMBOLS

□: CRITICAL

⊠: MAJOR

▽: ZERO DEFECT

▽: S.P.C

Toleance

| | |
|---|---|
| x. | ±0.60 |
| .x | ±0.40 |
| .xx | ±0.25 |

| PART NAME: | SCSI DB 100Pin Male to Male Cable With Zinc Hood | | | | PART NO: | A09-10011XXX-01 | |
|---|---|---|---|---|---|---|---|
| REV: | A | UNIT: | mm | DRW BY | CHK BY | APP BY | DRAWING NO. |
| SCALE: | N:1 | DATE: | 2025/02/10 | Huangmei | Jack Chen | | A09-100 |

KinKuo 东莞市箐国电子有限公司

www.KinKuo.com