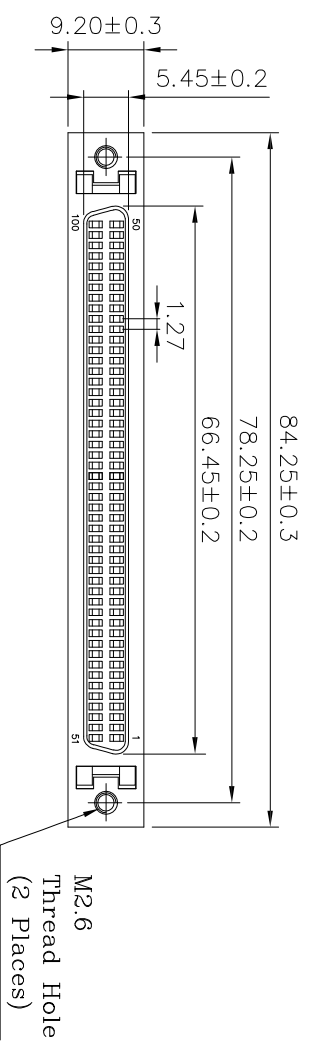


- ELECTRICAL CHARACTERISTICS

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500 V AC/Min
 Insulation Resistance: 500M Ω /Min
 Contact Resistance: 35m Ω /Max
 Operation Temperature: -55 $^{\circ}$ C ~ +105 $^{\circ}$ C






PART NO:
B02-10021E X-X X

WIRE HOLDER: _____
 (28AWG or 30AWG WIRE)
 6 = 0.62mm
 7 = 0.75mm
 9 = 0.90mm

LOCK TYPE: _____
 S1 = UNC #2-56
 S2 = UNC #4-40
 S3 = M2.6
 L0 = Latch Type

4	COVER	PBT+30%G.F. (UL 94V-0)	COLOR: BLACK	
3	HOUSING	PBT+30%G.F. (UL 94V-0)	COLOR: BLACK	
2	SHELL	SPCC (t=0.50mm)	Ni Plating	
1	TERMINAL	PHOSPHOR BRONZE(t=0.25mm)	CONTACT AREA: Au 5u" SOLDER AREA: Sn 100u" UNDER-PLATING: Ni 50u"	
ITEM	DESC.	MATERIAL	REMARKS	PART REMARKS

PART NAME:		SCSI DB-100Pin Female Connector For Cable					PART NO:	B02-100211EX-XX	
Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.	
	SCALE:	N:1	DATE:	2022/03/11	Huangmei	Jock Chen			
	X.	±0.60							
	.x	±0.40							
.xx	±0.25								
									
 东莞市箐国电子有限公司 www.kinkuo.com									

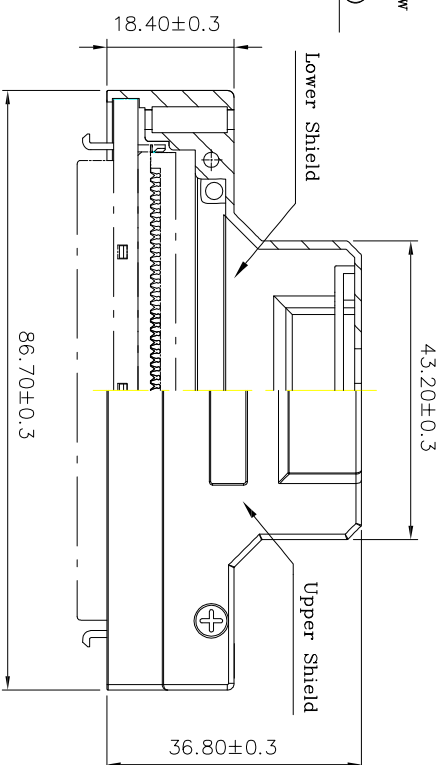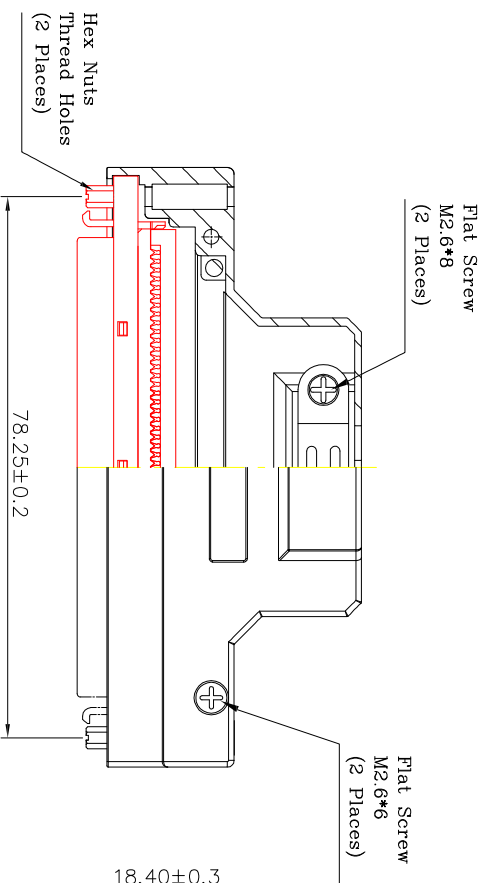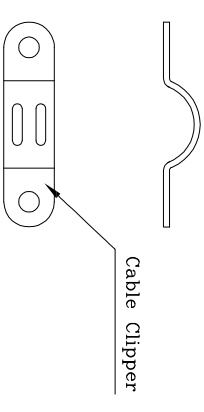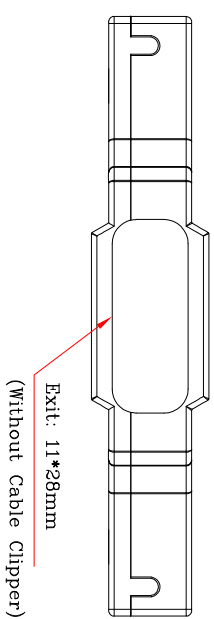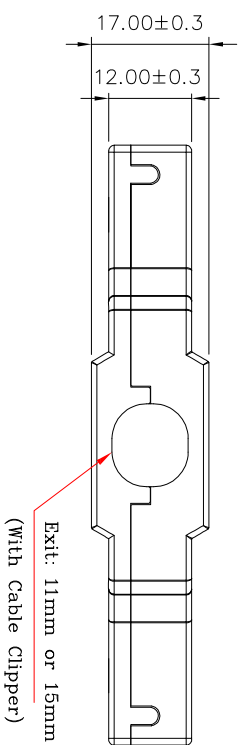

S Type

Type I

PART NO:

B02-100N8NX-XX

TYPE

S= SCREW TYPE

L= LATCH TYPE

ENTRY HOLE SIZES: _____

$$11 = (\text{OD } 11.0\text{mm})$$

15 = (OD 15.0mm)

$$2Y = (OD\ 11.0 \times 28.0\text{mm})$$

FEATURES:

- Round cable straight exit
- Strain Relief Staple With Jackscrew
- Back shell desing by Die-Cast
- Excellent EMI/RFI protection

MATERIALS:

- Back Shell: Zinc plated nickel over copper
- Hex Nut: Brass Nickel Plated
- Screw: steel nickel plated over copper
- Cable Clipper: steel nickel plated

- Back Shell: Zinc plated nickel over copper
- Hex Nut: Brass Nickel plated
- Screw: steel nickel plated over copper
- Cable Clipper: steel nickel plated

PART NAME:	SCSI Metal Hood for 100Pin Female Connector	PART NO:	B02-100NN8NX-XX
------------	---	----------	-----------------

Tolerance	REV:	A	UNIT:	mm	DRW BY	CHK BY	APP BY	DRAWING NO.
	SCALE:	N:1	DATE:	2018/03/11	Huangmei	Jack Chen		
X. ±0.60								B02-100

x	±0.40
.xx	±0.25
	
 东莞市箐国电子有限公司 www.kinkuo.com	