


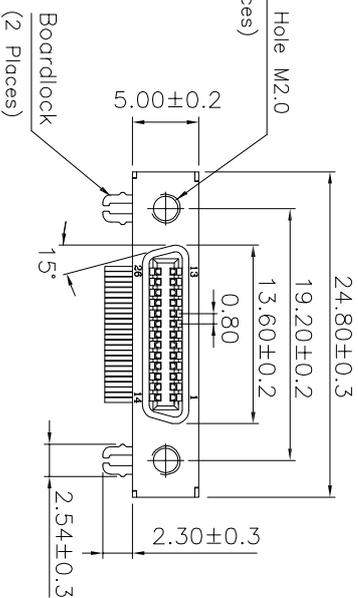


**PCB Layout**

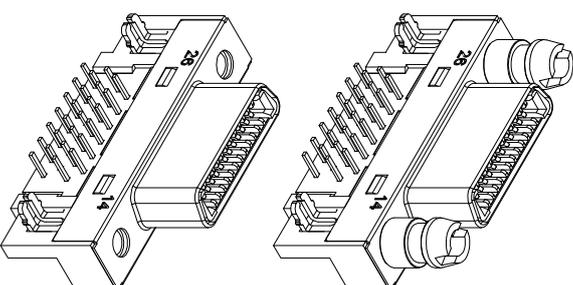

- Contact Current Voltage: 125V AC
- Current Rating: 0.5 Amp
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 350V AC
- Contact Resistance: 70mΩ Max
- Temperature Range: -45°C ~ +85°C

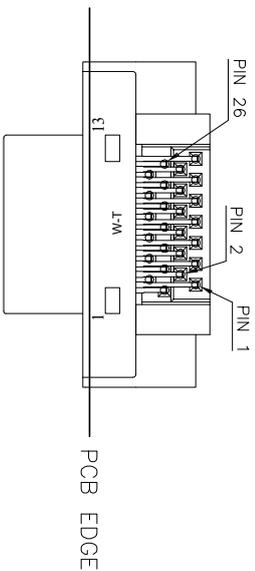

5	Nut	Steel	Nickel Plated	
4	Boardlock	Brass	Tin Plated	
3	HOUSING	PA9T UL94V-0	COLOR:BLACK	
2	SHELL	SPCC	PLATING:NI	
1	TERMINAL	PHOSPHOR BRONZE	CONTACT AREA:Au 30u" SOLDER AREA:Sn UNDER-PLATING:NI	

PART NAME:	SDR 26Pin Female R/A Type Connector Pitch=0.8mm				
REV:	A	UNIT:	mm	PART NO.:	B06-026611YD-01
SCALE:	N:1	DATE:	2023/03/11	DRW BY:	Huangmei
				CHK BY:	Jock Chen
				APP BY:	Jock Chen
				DRWING NO.:	B06-026

QUALITY SYMBOLS

□ :  CRITICAL

⊠ :  MAJOR

▽ :  ZERO DEFECT

Tolerance

x : ±0.60

.x : ±0.40

.xx : ±0.25



A	△	2023/03/11	NEW ISSUE	Jock Chen
SIDE	DATE	DESCRIPTION	APPROVER	

8	7	6	5	4	3	2	1
---	---	---	---	---	---	---	---



东莞市箐国电子有限公司

www.KinKuo.com