This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior concert, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS

SYM	ECN	DESCRIPTION	DATE	APPROVED
E	N/A	Change the structure of the pre-load	11/20'19	IP



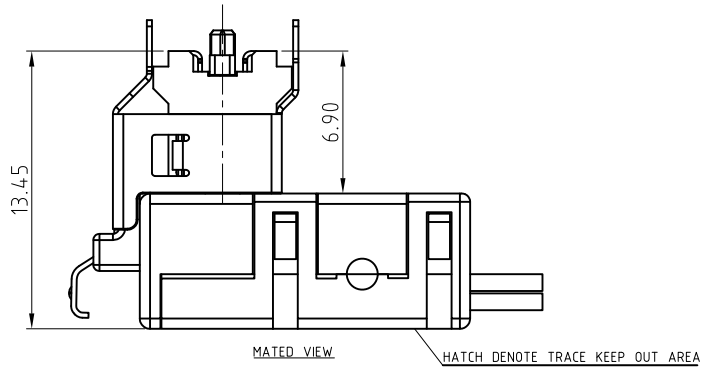





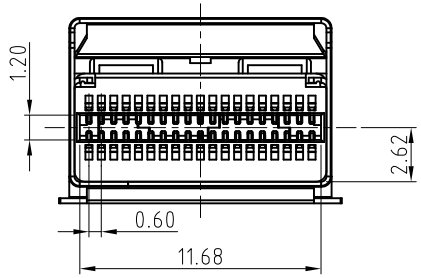

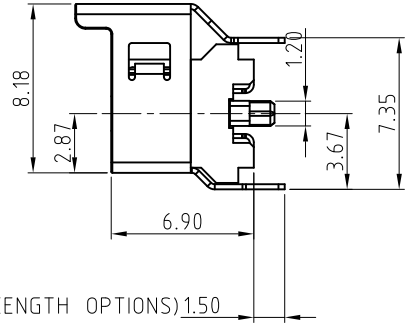

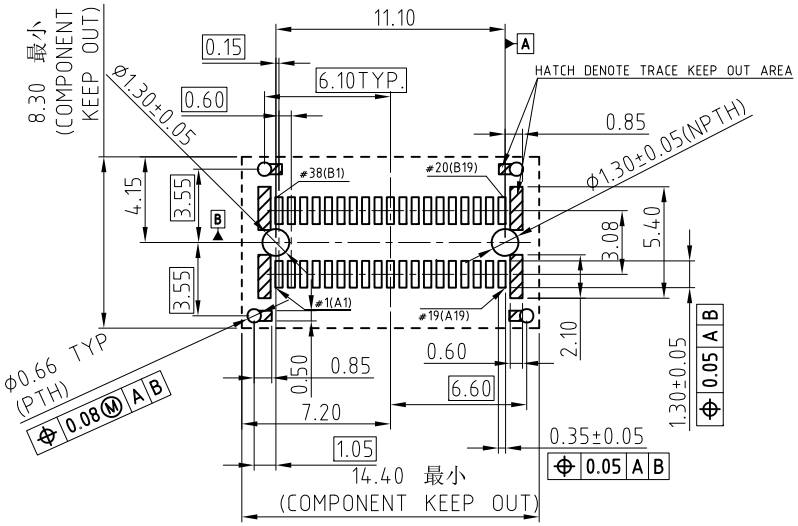

NOTES:

1. MATERIAL:

HOUSING: SOLDER REFLOW PROCESS COMPATIBLE LCP, UL94V-0,COLOR BLACK

COVER: STAINLESS STEEL

CONTACTS: HIGH PERFORMANCE COPPER ALLOY,PLATING REFER TO P/N SYSTEM

LATCH: STAINLESS STEEL, SOLDERABLE NICKEL OVER ALL

2. RoHS COMPLIANT

3. ORDER P/N SYSTEM:

U10-E038-XXXX

Options
- 0T: standard construction with tape&reel
- 1T: no resonance damping feature with tape&reel

LATCH PIN LENGTH OPTIONS
- 2 : 1.50
- 4 : 2.20
- 5 : 3.00
- 6 : 4.20

CONTACT PLATING OPTION
- 2 : 30 MICROINCHES OF GOLD ON MATING END WITH MATTE TIN ON SOLDER TERMINATION, NICKEL UNDERPLATE ALL OVER
- 3 : 15 MICROINCHES OF GOLD ON MATING END WITH MATTE TIN ON SOLDER TERMINATION, NICKEL UNDERPLATE ALL OVER

Amphenol Shenzhen RoHS Compliant 2011/65/EU

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X +/-		0.20
.XX +/-		0.15
.XXX +/-		0.10
FRACTIONS +/-		
ANGLES +/-		2°

FOR MATERIALS AND FINISHES SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS U.S. (METRIC) / INCHES (MM)

APPROVAL		DATE
DRAWN	Victor.Li	09/06'19
CHECKED	Tony.Tang	09/06'19
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION

Amphenol

Amphenol East Asia Limited

TITLE SLIMSAS Low Profile x4 Receptacle Vertical

SIZE	DRAWING NO.	REV.
A3	U10-E038-XXXX	E

SCALE 2:1 SHEET 1 OF 1