






REV.	ECN NUMBER	DESCRIPTION	DATE	DRAWN	CHECKE	APPROVE
AX1	ECNXXXXXXXX	增加PE袋	07/29/20	Shili Yang	Zhiyu Chen	Felix Gong
AX2	ECNXXXXXXXX	增加防尘盖	08/14/20	Shili Yang	Zhiyu Chen	Felix Gong

- NOTES:**
- ELECTRICAL AND MECHANICAL PERFORMANCE SHOULD MEET THE SAS3.0 INDUSTRIAL STANDARD
电气和机械特性满足SAS3.0工业标准
 - THE CABLE ASSEMBLY SHOULD BE ROHS COMPLIANT.
该产品符合ROHS.

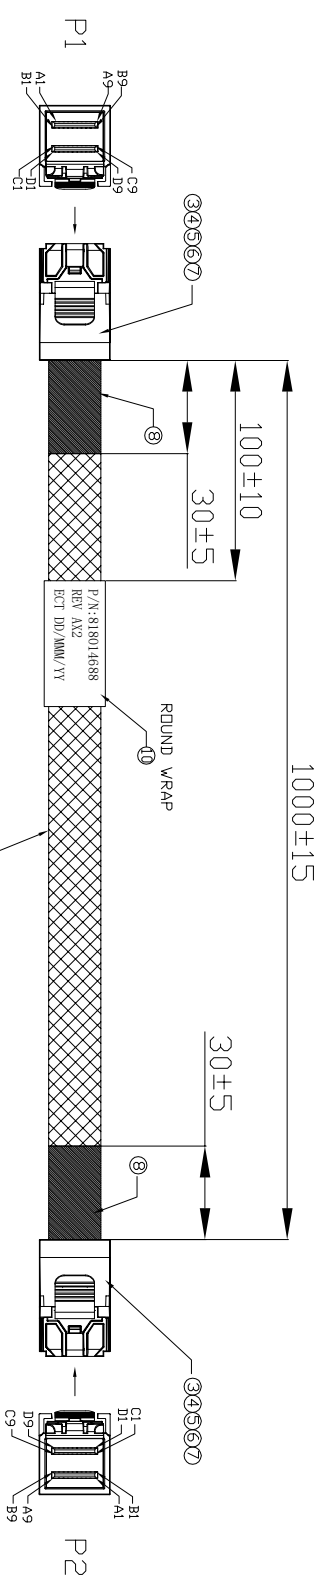

NOTE:
1、产品单PCS包装

P1		P2	
A1	30AWG RED	A2	A1
A2	30AWG GRAY	A1	A2
A3		C3	C3
A4		C4	C4
A5		C5	C5
A6		C6	C6
A7		C7	C7
A8		C8	C8
A9		C9	C9
B1	30AWG RED	B2	B2
B2	30AWG GRAY	B1	B1
B3		D3	D3
B4		D4	D4
B5		D5	D5
B6		D6	D6
B7		D7	D7
B8		D8	D8
B9		D9	D9
C1	30AWG RED	C2	C2
C2	30AWG GRAY	C1	C1
C3		A3	A3
C4		A4	A4
C5		A5	A5
C6		A6	A6
C7		A7	A7
C8		A8	A8
C9		A9	A9
D1	30AWG RED	D2	D2
D2	30AWG GRAY	D1	D1
D3		B3	B3
D4		B4	B4
D5		B5	B5
D6		B6	B6
D7		B7	B7
D8		B8	B8
D9		B9	B9



ITEM	P/N	DESCRIPTION	QTY	UNIT
1	6030010089	SAS3.0 Cable: UL20744,30AWG X 1P+2EAM/R2	A/R	mm
2	6030020021	WIRE:UL2651,30AWG X 2C,R2	A/R	mm
3	605040344	PCB: For HD MiniSAS STR&RA,Impedance:100Ω	4	PCS
4	7214688101	Front Cover: For HD MiniSAS STR,PA66,UL94V-0,BLACK	2	PCS
5	7214688102	Rear Cover: For HD MiniSAS STR,PA66,UL94V-0,BLACK	2	PCS
6	7214688103	Fixed Housing: For HD MiniSAS STR,PA66,UL94V-0,BLACK	2	PCS
7	602010083	Resin: hot melt adhesive, UL94V-0, Amber.	A/R	Kg
8	605011152	Polyester tape: T=0.12mm,W=30mm,BLACK,ROHS	A/R	mm
9	605040425	EXPANDO TUBE: OD=6mm,BLACK,W=1,ROHS	A/R	mm
10	604100070	LABEL: PVC,25*50mm,WHITE,W=1,ROHS	1	PCS
11	604020082	防水袋,开口200*280*0.06mm, PE料, 透明, 自封	1	PCS
12	7215146107	DIST COVER:FOR HD MINISAS, WHITE	2	PCS

ROHS

GENERAL TOLERANCE	SCALE:
XX± 0.25	1:1
X± 0.20	
.X± 0.13	
XX± 0.05	

SCALE:	UNIT:	SIZE:
1:1	mm	A4

DRAWN:	CHECK:	APPROVE:
Shili Yang		

DATE:	DATE:	DATE:
08/14/2020		

DWG. NO.:	PARTS NO.(INTENDED USE):
151-14688-01	818014688

TITLE:	REV.
HD MINISAS 4I STR TO HD MINISAS 4I STR	AX2

SHEET:	REV.
1/1	AX2

东莞市誉国电子有限公司